

N8361 Series High-accuracy Programmable Battery Simulator



Battery Simulator

Product Introduction

N8361 is a high performance battery simulator with power up to 180W, covering the specifications of lithium battery for consumer electronics mainstream market. N8361 supports a variety of test functions, such as power mode, charging mode, battery simulation, internal resistance simulation, SOC simulation, fault simulation, etc., to achieve a variety of battery characteristics simulation; The current flows bidirectionally, and the source load state changes quickly. N8361 products can be widely used in the field of consumer electronics testing.

Application Fields


- ▶ Battery protection board test
- ▶ Portable consumer electronics R&D and production, such as mobiles, bluetooth earphones, smartwatch, etc
- ▶ Power tools production test, such as electric screwdriver
- ▶ Testing of Battery powered, small power supply such as DC-DC, wireless charging and other product
- ▶ Battery maintenance equipment testing

Main Features

- ▶ Voltage Range: 0~20V
- ▶ Current Range: -10A~+10A
- ▶ Single channel power up to 200W
- ▶ Voltage rise and fall time $\leq 50\mu s$
- ▶ Current Accuracy up to 1 μA
- ▶ High precision DVM
- ▶ Support front and rear outlet, easier for desktop & integration
- ▶ With digital I/O, supporting trigger test
- ▶ LAN/RS232/CAN Interface

Current flowing bidirectionally to make it both a power supply and a load


The current flows in both directions. N8361 can both suck and output current, and the current is up to 10A. The output port has a switch component, and the off state disconnects the physical connection with the external loop.

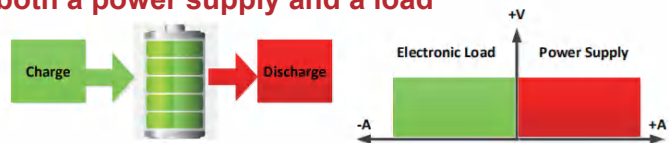

▲ N8361 Two-quadrant Operation

Variable output impedance allowing battery internal resistance simulation

N8361 has the battery internal resistance simulation function, and supports resistance value programming. The programmable range is 0-20 Ω , which can emulate the variation graph consistent with the real battery internal resistance characteristics.



▲ Schematic of Battery and N8361-12-15

Front and rear wiring design




N8361 is equipped with banana jack at the front panel and output terminal at the rear panel, which is easy for desktop application & integration, and improves the test efficiency.



DVM test function

N8361 series provides basic circuit measurement function. It has one channel built-in DVM to test external voltage. The voltage range is -30V ~ 30V, and the resolution is 0.1mV. The LCD screen will show the dynamic data, which is convenient for users to observe the voltage changes.

Product Dimension

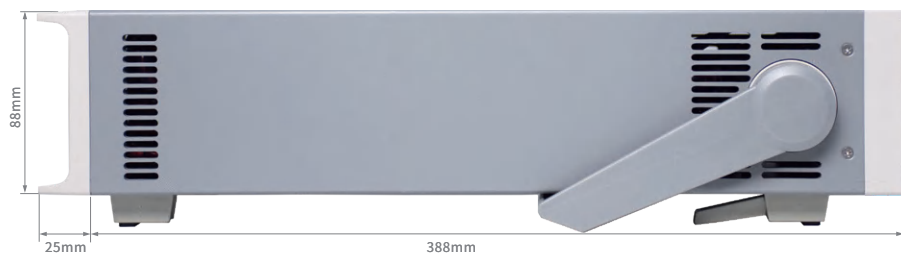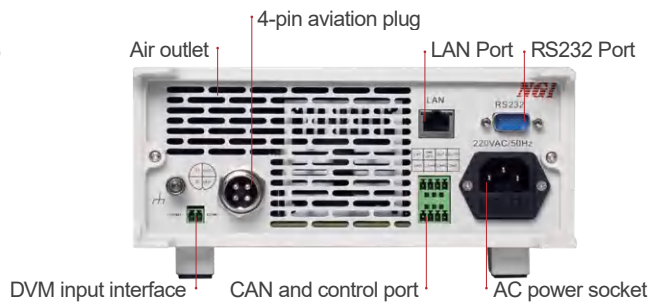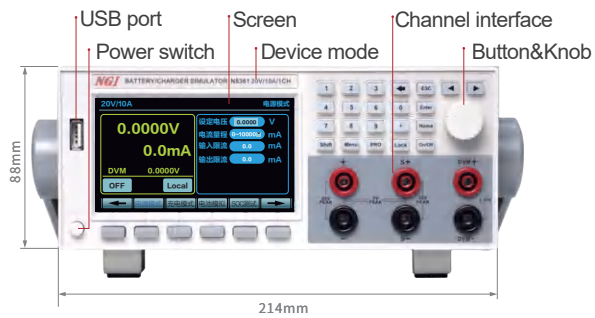

Technical Data Sheet

Model	N8361-20-10		
Current	±10A/CH		
Voltage	20V/CH		
Power	200W/CH		
Channels	1CH		
CV Mode			
Range	0~20V		
Setting Resolution	0.1mV		
Setting Accuracy (23±5°C)	0.01%+3mV		
Readback Resolution	0.1mV		
Readback Accuracy (23±5°C)	0.01%+2mV		
Output Voltage Settling Time	≤10ms		
Load Regulation	0.01%		
Line Regulation	0.01%		
Voltage Ripple (20Hz-20MHz)	1mVrms		
Temperature Coefficient (0-40°C)	≤25ppm/°C		
Current Measurement			
Range 1			
Range	-10~10A		
Resolution	0.1mA		
Accuracy (23±5°C)	0.05%+4mA		
Temperature Coefficient (0-40°C)	≤50ppm/°C		
Range 2			
Range	-1~1A		
Resolution	0.01mA		
Accuracy (23±5°C)	0.05%+0.4mA		
Temperature Coefficient (0-40°C)	≤50ppm/°C		
Range 3			
Range	-1~1mA		
Resolution	0.1μA		
Accuracy (23±5°C)	0.05%+1μA		
Temperature Coefficient (0-40°C)	≤50ppm/°C		
Current Protection Limit			
Range	-10~10A		
Setting Resolution	0.1mA		
Setting Accuracy(23±5°C)	0.05%+5mA		
Ripple Noise (20Hz-20MHz)	<5mArms		
Temperature Coefficient (0-40°C)	≤50ppm/°C		
DVM Function			
Channels	1CH	Measurement Accuracy	±0.01%F.S.
Measurement Range	-30V~+30V	Measurement Frequency	4Hz
Measurement Resolution	0.1mV	Input Impedance	2MΩ
Terminal	Pluggable terminal	Temperature Coefficient (0~40°C)	30ppm/°C
Dynamic Characteristics			
Voltage Rise Time (10%-90%F.S. Variation Time)	<50μs (no load)	Voltage Rise Time (10%-90%F.S. Variation Time)	<50μs (pure resistive full load)
Voltage Fall Time (90%-10%F.S. Variation Time)	<50μs (no load)	Voltage Fall Time (90%-10%F.S. Variation Time)	<50μs (pure resistive full load)
Transient Voltage Drop ¹	600mV	Transient Recovery Time ²	<100μs
Others			
Communication Response Time	≤10ms		
Interface	LAN/RS232/CAN		
AC Input	Single phase 100-240V AC, frequency 47Hz~63Hz, current ≤2A@220V, ≤4A@110V		
Temperature	Operating temperature: 0°C~40°C, storage temperature: -20°C~60°C		
Operating Environment	Altitude <2000m, relative humidity: 5%~90%RH(non-condensing), atmospheric pressure: 80~110kPa		
Net Weight	Approx. 4kg		
Dimension	2U, 88.0(H)*214.0(W)*388.0(D)mm		

Note 1: Load varies from 10% to 90% by full voltage output.

Note 2: Load varies from 10% to 90% by full voltage output, with voltage recovering within 50mV of previous voltage.

Note 3: For other specifications, please contact NGI.

Note 4: All specifications are subject to change without notice.

V i t e c P O W E R G m b H

Bahnstraße 65-67/2/2, A-2230 Gänserndorf, Austria, Tel.: +43 (0)2282 3144, Email: office@vitecpower.com

www.vitecpower.com