



FEATURES

3U x 8TE x 160 mm
 Vin : 72Vdc
 V1 : +5V/2A V2 : +5V/2A
 2 outputs fully independent
 Pout max : 20W

APPLICATIONS

Specially designed for hard environment applications with vibrations like railways.

INPUT

Voltage range : 36-140Vdc Nominal : 72Vdc
 Input protection : Transient : EN50155
 Fuse 1A
 Reverse polarity
 EMI : EN50121-1, EN50121-3-2

OUTPUT

Voltage : V1 : +5V/2A 10W
 V2 : +5V/2A 10W
 Imax. : 2A per output
 Pmax. : 20W total
 Current limit and short circuit : protected on every output

	V 1		V 2		Conditions
	Typ.	Max.	Typ.	Max.	
Line regulation	+/- 1 %	+/-1,5 %	+/- 1 %	+/-1,5 %	Low line to high line ; full load
Load regulation	- 4 % / + 2 %	+/- 5 %	- 4 % / + 2 %	+/- 5 %	25 % to full load
Ripple and noise	0.5 %	1 %	0.5 %	1 %	Peak to peak - Bandwidth 20MHz according to o/p voltage
Current limit	180 to 200 % of I nominal		180 to 200 % of I nominal		Vout = 95% of nominal ; Automatic restart

SIGNALS

Output OK : green led in front panel for each output

ENVIRONMENTAL

Storage temperature : -40°C to +105°C
Operating temperature : -40°C to +91°C
Operating temperature in natural convection : derating 0,5 % / °C above 71°C

ISOLATION

Input to chassis : 1000 Vrms or 1414 Vdc
Input to Output : 2000 Vrms or 2828 Vdc
Output to Chassis : 100 Mohms at 500Vdc
Output 1 to output 2 : 500 Vrms or 707 Vdc

GENERAL

Safety : built to meet EN60950
EMI : built to meet EN50121-1, EN50121-3-2, conducted.
ENV : built to meet EN50155

MECHANICALS

Solder side of the PCB protected by PBT sheet UL94V0.

INPUT : SOURIAU UTG0128P male

PIN	DESCRIPTION
A	+BT1
B	NC
C	+BT2
D	NC
E	0 BT2
F	NC
G	0 BT1
H	Ground



OUTPUT : DIN41612 form D32 male 90°




PIN		DESCRIPTION
a	c	
2	2	Ground
4-6	4-6	NC
8	8	0 V1
10	10	NC
12	12	+5 V1
14-16	14-16	NC
18	18	0 V2
20	20	NC
22	22	+5 V2
24-30	24-30	NC
32	32	Ground

MECHANICALS

Face avant ATOS 3U 8TE
 réf: SH15600
 Traitement: ALODINE 1200

Sérigraphie dans l'axe des LEDS
 Hauteur sérigraphie: 2mm
 Type de caractère: SWIS 721 Cn BT
 (équivalent: E-NORMAL BLOCK)
 Les caractères sont remplis
 Encre couleur: noire

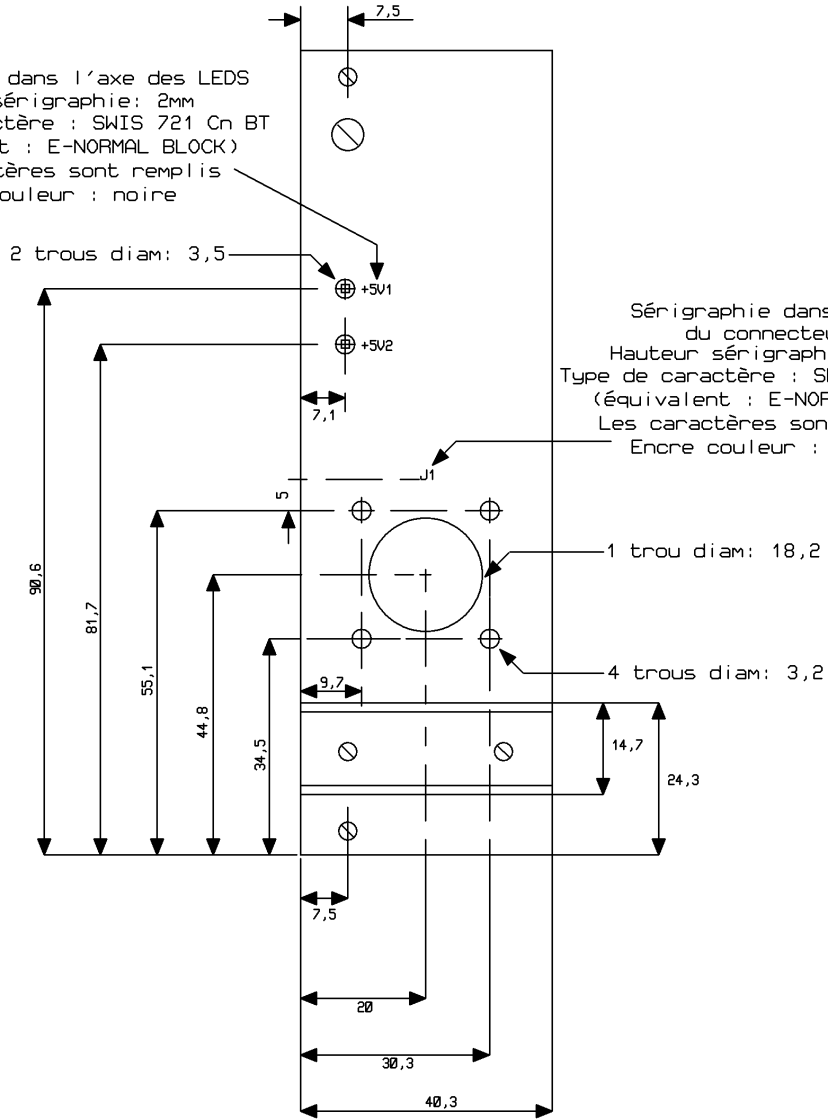

Sérigraphie dans l'axe
 du connecteur
 Hauteur sérigraphie: 2mm
 Type de caractère: SWIS 721 Cn BT
 (équivalent: E-NORMAL BLOCK)
 Les caractères sont remplis
 Encre couleur: noire