



## FEATURES

150 x 70 x 49 mm  
 INPUT : 12, 24, 48, 72, 110Vdc IN  
 1 OUTPUT : from 3V3 to 48Vdc up to 100W  
 Efficiency : 82 % typ.  
 Convection cooled



## APPLICATIONS

This range of power supplies is specially designed for hard environment applications with vibrations and high temperature like railways.

## INPUT

Voltage range :	12Vnom	Range : 10-20Vdc	Limited to 50W
	24Vnom	Range : 18-36Vdc	
	48Vnom	Range : 36-75Vdc	
	72Vnom	Range : 55-100Vdc	
	110Vnom	Range : 66-160Vdc	

Input protection : fuse 3,15A  
 transient and surges protected  
 reverse polarity protected

## OUTPUT

Voltage : 3V3, 5V, 12V, 25V, 24V, 28V, 48Vdc  
 Power : From 25W to 100W  
 Trim range : 50% to 110% (factory adjustable)

	OUTPUT		Conditions
	Typ.	Max.	
<b>Line regulation</b>	0,05 %	0,5 %	Low line to high line ; full load
<b>Load regulation</b>	0,2 %	1 %	No load to full load
<b>Ripple and noise</b>	1,5 %	3 %	Peak to peak, nom. Input ; full load
<b>Current limit</b>	110 to 140 % of I nominal		Vout = 95% of nominal ; Automatic restart

## SIGNALS

Input OK :	Led
Output OK :	Output isolated, open collector, closed if output OK.
Inhibit :	General shutdown pin 1,2 CN6 shorted to inhibit.

## ENVIRONMENTAL

Storage temperature :	-20°C to +100°C
Operating temperature in natural convection :	-20°C to 70°C ambient Convection cooled, derating 2W/°C above 50°C



## ISOLATION

Input to chassis :	1500 Vrms or 2121 Vdc
Input to Output :	3000 Vrms or 4242 Vdc
Output to Chassis :	>100 Mohms at 500 Vdc

## GENERAL

<b>Safety :</b>	<b>built to meet EN60950</b>
<b>EMI :</b>	<b>built to meet EN55022B, EN50121-3-2</b>
<b>ENV :</b>	<b>built to meet EN50155</b>

## MECHANICALS

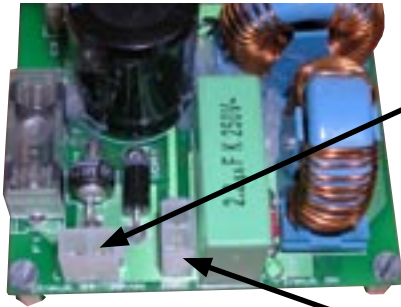

### INPUT : MOLEX 39281023

CN1	DESCRIPTION
PIN 1	+ IN
PIN 2	- IN

### INHIBIT : MOLEX 39281023

CN6	DESCRIPTION
PIN 1	Inhibit
PIN 2	Inhibit

### OUTPUT




	DESCRIPTION
CN3	+ output
CN2	+ output

### OUTPUT

	DESCRIPTION
CN5	- output
CN4	- output

### OUTPUT : MOLEX 39281043

CN7	DESCRIPTION
PIN 1	- Sense
PIN 2	+ Sense
PIN 3	Output OK (collector)
PIN 4	Output OK (emettor)

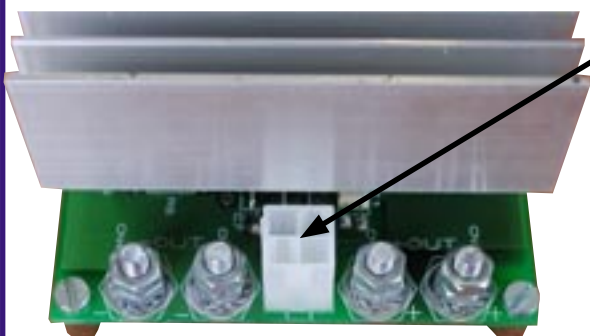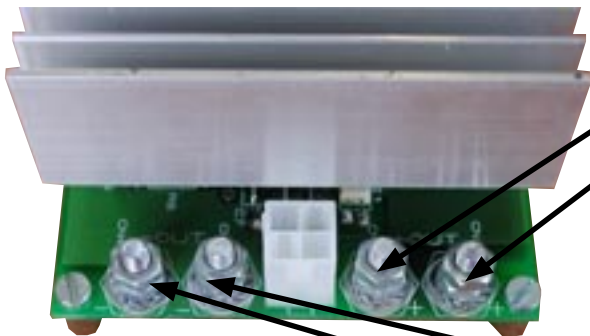


## HOW TO ORDER ?

Just fill in.

Input current limited to 3,15A

Pmax : 100W

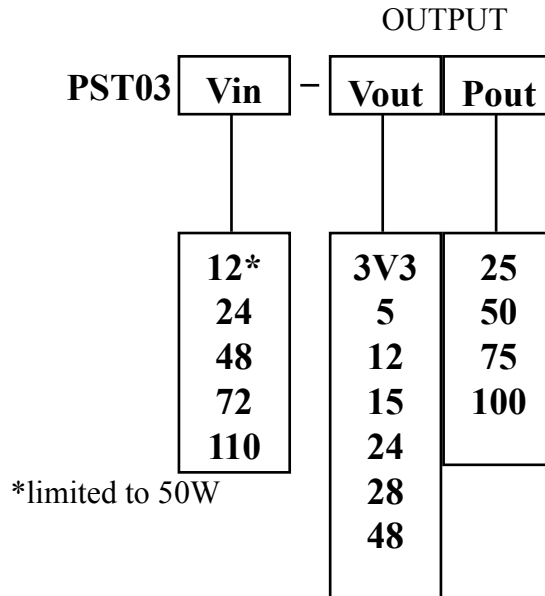

COMPANY NAME :

ADDRESS :

NAME :

JOB TITLE :

QUANTITY :

DELIVERY DATE :

INFORMATION :

SEND TO :

**POWER SYSTEM TECHNOLOGY**  
**19, 21 rue Gustave Eiffel - Bâtiment A2**  
**28630 GELLAINVILLE - FRANCE**  
**Tel. : +33 (0) 2 37 30 78 40 - Fax : +33 (0) 2 37 30 77 71**  
**Email : sales@powersystemtechnology.com**