

SIDA100 SERIES



100W Desktop Power Supply for Industrial Equipment

- Wide Input Voltage 90 to 260 VAC, 47 to 63Hz
- Active Power Factor Correction
- IEC-320-C14 input inlet
- Output Voltage Available From 11VDC Thru 48VDC
- Single Output
- Class I Insulation
- Operating temperature -20~70°C
- Input Surge Current, Over Voltage, Over Load and Output Voltage protection.
- CEC Level V, Energy Star 2.0, and RoHS Compliance

3 Year Warranty

Approvals: UL US CBC CE SFC CCC PSE RoHS ENERGY STAR

Single Output

| Product Number | Output Voltage | Max. Output Current | Total Regulation | Maximum Output Power |
|----------------|----------------|---------------------|------------------|----------------------|
| SIDA100-S05 | 11 ~ 13 VDC | 9.09 ~ 7.69 A | 5% | 100W |
| SIDA100-S06 | 13 ~ 16 VDC | 7.69 ~ 6.25 A | 4% | 100W |
| SIDA100-S07 | 16 ~ 21 VDC | 6.25 ~ 4.76 A | 4% | 100W |
| SIDA100-S08 | 21 ~ 27 VDC | 4.76 ~ 3.70 A | 4% | 100W |
| SIDA100-S09 | 27 ~ 33 VDC | 3.70 ~ 3.03 A | 3% | 100W |
| SIDA100-S10 | 33 ~ 40 VDC | 3.00 ~ 2.50 A | 3% | 100W |
| SIDA100-S11 | 40 ~ 48 VDC | 2.50 ~ 2.08 A | 3% | 100W |

Total Regulation is conditioned by below configuration

The total regulation on each model is required to use AWG#18x3C+ AWG#16x3C/4FT output cable.

Electrical Characteristics

| Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|-------------------------------|--|-------|------|------|------|
| Input Voltage | Operating Voltage | 90 | | 260 | VAC |
| Input Frequency | | 47 | | 63 | Hz |
| Power Factor Correction | Io=Full load, Vin=230VAC | 0.95 | | 1.00 | |
| Output Power Range | Vin=90 to 260VAC | 0 | | 100 | W |
| Input Current (Low Line) | Io=Full load, Vin=115VAC | | | 1.35 | A |
| Input Current (High Line) | Io=Full load, Vin=230VAC | | | 0.5 | A |
| Low Line Inrush Current | Io=Full load, 25°C, Cool start, Vin=115VAC | | 44 | 50 | A |
| High Line Inrush Current | Io=Full load, 25°C, Cool start, Vin=230VAC | | 85 | 100 | A |
| Efficiency | Io=Full Load, Vin=230VAC | | 87 | 90 | % |
| Line Regulation | Io=Full Load | | 0.5 | 1 | % |
| Load Regulation | Vin=230VAC | | 3 | 5 | % |
| Over Voltage Protection | | 112 | | 132 | % |
| Over Current Protection | | 110 | | 150 | % |
| Transient Response | Io=Full Load to Half Load, Vin=100VAC | | | 4 | mS |
| Hold-Up Time | Io=Full Load, Vin=110VAC | 12 | | | mS |
| Start Up Time | Io=Full Load, Vin=100VAC | 0.3 | 1.5 | 2 | S |
| Ripple & Noise (Peak to Peak) | Full Load, Vin=90VAC | | 0.5 | 1 | % |
| Safety Ground Leakage Current | Io=Full Load, Vin=240VAC/60Hz | | 0.5 | 0.75 | mA |
| Temperature Coefficient | All output | -0.04 | | 0.04 | %/°C |


Conditions

| Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|---|-----------------|------|------|------|------|
| Operating Temperature | | -20 | 40 | 70 | °C |
| Storage Temperature | | -40 | | 85 | °C |
| Relative Humidity | | 5 | | 95 | % |
| Operation temperature at 25°C, calculated per MIL-HDBK-217F | | 0.1M | | | Hrs |
| Derate linearly from 100% load at 40°C to 50% load at 70°C | | | | | |

Approvals and Compliance

| Parameter | Test Conditions | Min. | Unit |
|--|------------------------|------|-------|
| Dielectric Withstanding Voltage for Primary to secondary | Primary to secondary | 4242 | VDC |
| Dielectric Withstanding Voltage for Primary to Ground | Primary to ground | 2121 | VDC |
| Isolation Resistance | Test Voltage = 2100VDC | 50 | MΩ |
| EMI requirements for CISPR-11 | Vin=230VAC | B | CLASS |
| EMI requirements for FCC PART-15 | Vin=120VAC | B | CLASS |

Mechanical and PIN out

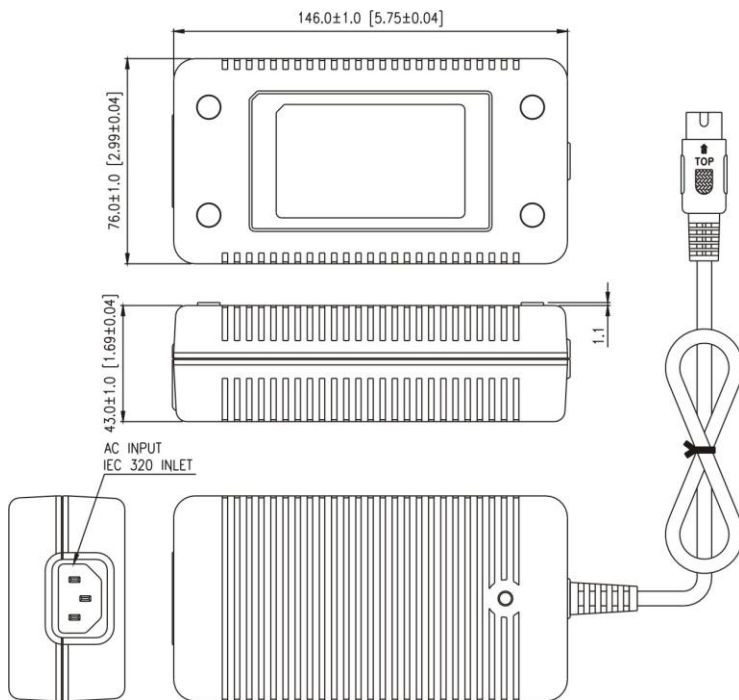

Note:

1. Dimensions are shown in mm & inch
2. Weight: 490~670g approx
(Exclude the input cord)
3. Optional output connector.