

STDA25C SERIES



25W Desktop Power Supply for I.T. Equipment

- Wide Input Voltage 90 to 264 VAC, 47 to 63Hz
- IEC-320-C6 Input Inlet
- Output Voltage Available From 5VDC Thru 48VDC
- Approved as Limited Power Source (LPS), Splash Proof
- Class I Insulation
- Input Surge Current, Over Voltage, Over Load and Output Voltage protection.
- Energy Star 2.0, CEC V/IV, and RoHS compliance

2 Year Warranty

Approvals:           

Single Output

Model Number	Output Voltage	Max. Output Current	Total Regulation	Max Output Power
STDA25C-S02	05 ~ 06 VDC	3.00 ~ 2.75 A	5%	16.5W
STDA25C-S03	06 ~ 08 VDC	3.30 ~ 2.50 A	5%	20W
STDA25C-S04	08 ~ 11 VDC	2.75 ~ 2.00 A	5%	22W
STDA25C-S05	11 ~ 13 VDC	2.27 ~ 1.92 A	5%	25W
STDA25C-S06	13 ~ 16 VDC	1.92 ~ 1.56 A	5%	25W
STDA25C-S07	16 ~ 21 VDC	1.56 ~ 1.19 A	5%	25W
STDA25C-S08	21 ~ 27 VDC	1.19 ~ 0.92 A	3%	25W
STDA25C-S09	27 ~ 33 VDC	0.92 ~ 0.75 A	3%	25W
STDA25C-S10	33 ~ 40 VDC	0.75 ~ 0.62 A	3%	25W
STDA25C-S11	40 ~ 48 VDC	0.62 ~ 0.52 A	3%	25W

The output voltage under 30V had been approved by TUV/PSE.

The model number of S02~S11 had been approved by CEC Level V.

Electrical Characteristics

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Input Voltage	Operating Voltage	90		264	VAC
Input Frequency		47		63	Hz
Output Power Range	Vin=90 to 264VAC	0		25	W
Input Current (Low Line)	Io=Full load, Vin=115VAC			0.4	A
Input Current (High Line)	Io=Full load, Vin=230VAC			0.25	A
Low Line Inrush Current	Io=Full load, 25°C, Cool start, Vin=115VAC		12	15	A
High Line Inrush Current	Io=Full load, 25°C, Cool start, Vin=230VAC		26	30	A
Efficiency	Io=Full Load, Vin=230VAC	75	85	95	%
Line Regulation	Io=Full Load		0.5	1	%
Load Regulation	Vin=230VAC	1	3	5	%
Over Voltage Protection			Nil		%
Over Current Protection		110		150	%
Transient Response	Io=Full Load to Half Load, Vin=100VAC			4	mS
Hold-Up Time	Io=Full Load, Vin=110VAC	12	14	16	mS
Start Up Time	Io=Full Load, Vin=100VAC		0.25	0.5	S
Ripple & Noise (Peak to Peak)	Full Load, Vin=90VAC		0.5	1	%
Safety Ground Leakage Current	Io=Full Load, Vin=240VAC		0.5	0.75	mA
Temperature Coefficient	All output	-0.04		0.04	%/°C
No-Load Power Consumption	No Load, Vin=240VAC	0	0.4	0.5	W


Conditions

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Operating Temperature		0	40	70	°C
Storage Temperature		-40		85	°C
Relative Humidity		5		95	%
Operation temperature at 25°C, calculated per MIL-HDBK-217F		0.3M			Hrs
Derate linearly from 100% load at 40°C to 50% load at 70°C					

Approvals and Compliance

Parameter	Test Conditions	Min.	Unit
Dielectric Withstanding Voltage for Primary to secondary	Primary to secondary	4242	VDC
Dielectric Withstanding Voltage for Primary to Ground	Primary to ground	2121	VDC
Isolation Resistance	Test Voltage = 500VDC	50	MΩ
EMI requirements for CISPR-22	Vin=220VAC	B	CLASS
EMI requirements for FCC PART-15	Vin=110VAC	B	CLASS

Mechanical and PIN out

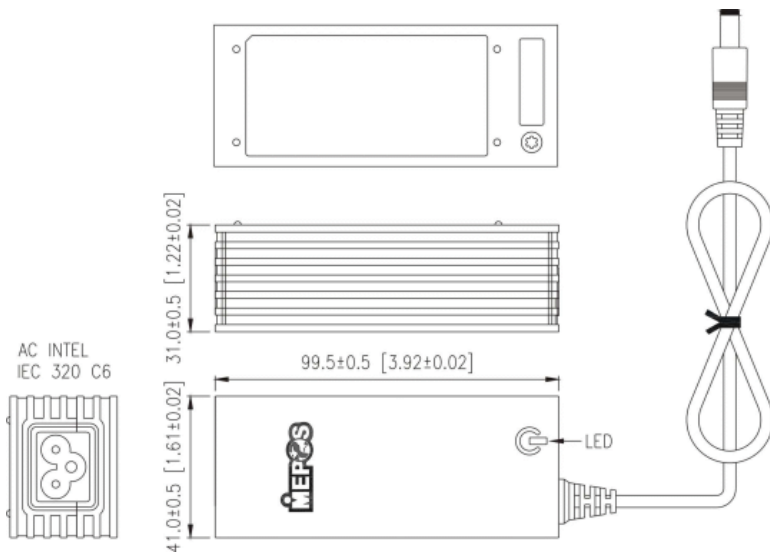

Note:

1. Dimensions are shown in mm & inch
2. Weight: approx. 170g
(Exclude the input cord)
3. Optional output connector.