

STDA68 SERIES



60W(80Wpk) Desktop Power Supply for I.T. Equipment

- Wide Input Voltage 90 to 264 VAC, 47 to 63 Hz
- IEC-320-C14 input inlet
- Single Output
- Optional output connector plug
- Power consumption (no load) < 0.5
- Class I Insulation
- Over voltage protection (crowbar design)

2 Year Warranty

Approvals:         

Single Output

| Product Number | Output Voltage | Output Current | Peak Output Current | Total Regulation | Maximum Output Power |
|----------------|----------------|----------------|---------------------|------------------|----------------------|
| STDA68-S05 | 11~13 VDC | 5.00 A | 6.66 A | 3% | 80Wpk (peak) |
| STDA68-S08 | 21~27 VDC | 2.50 A | 3.33 A | 2% | 80Wpk (peak) |

The total regulation on each model is required to use AWG#18/4FT output cable.

The regulation will be changed by modified output cable.

Electrical Characteristics

| Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|-------------------------------|--|-------|------|------|------|
| Input Voltage | Operating Voltage | 90 | | 264 | VAC |
| Input Frequency | | 47 | | 63 | Hz |
| Output Power Range | Vin=90 to 264VAC | 0 | | 60 | W |
| Input Current (Low Line) | Io=Full load, Vin=115VAC | | | 1.25 | A |
| Input Current (High Line) | Io=Full load, Vin=230VAC | | | 0.5 | A |
| Low Line Inrush Current | Io=Full load, 25°C, Cool start, Vin=115VAC | | 12 | 15 | A |
| High Line Inrush Current | Io=Full load, 25°C, Cool start, Vin=230VAC | | 26 | 30 | A |
| Efficiency | Io=Full Load, Vin=230VAC | 84 | | | % |
| Line Regulation | Io=Full Load | | 0.5 | 1 | % |
| Load Regulation | Vin=230VAC | | 3 | 5 | % |
| Over Voltage Protection | | 112 | | 132 | % |
| Over Current Protection | | 110 | | 150 | % |
| Transient Response | Io=Full Load to Half Load, Vin=100VAC | | | 4 | mS |
| Hold-Up Time | Io=Full Load, Vin=110VAC | 16 | | | mS |
| Start Up Time | Io=Full Load, Vin=100VAC | 0.3 | | 0.5 | S |
| Ripple & Noise (Peak to Peak) | Full Load, Vin=90VAC | | 0.5 | 1 | % |
| Safety Ground Leakage Current | Io=Full Load, Vin=240VAC | | 0.5 | 0.75 | mA |
| Temperature Coefficient | All output | -0.04 | | 0.04 | %/°C |
| No-Load Power Consumption | No load, Vin=240VAC | | 0.3 | 0.5 | W |


Conditions

| Parameter | Test Conditions | Min. | Typ. | Max. | Unit |
|---|-----------------|-------|------|------|------|
| Operating Temperature | | 0 | 50 | 70 | °C |
| Storage Temperature | | -40 | | 85 | °C |
| Relative Humidity | | 5 | | 95 | % |
| Operation temperature at 25°C, calculated per MIL-HDBK-217F | | 0.13M | | | Hrs |
| Derate linearly from 100% load at 50°C to 50% load at 70°C | | | | | |

Approvals and Compliance

| Parameter | Test Conditions | Min. | Unit |
|--|-----------------------|------|-------|
| Dielectric Withstanding Voltage for Primary to secondary | Primary to secondary | 4242 | VDC |
| Dielectric Withstanding Voltage for Primary to Ground | Primary to ground | 2121 | VDC |
| Isolation Resistance | Test Voltage = 500VDC | 50 | MΩ |
| EMI requirements for CISPR-22 | Vin=220VAC | B | CLASS |
| EMI requirements for FCC PART-15 | Vin=110VAC | B | CLASS |

Mechanical and PIN out

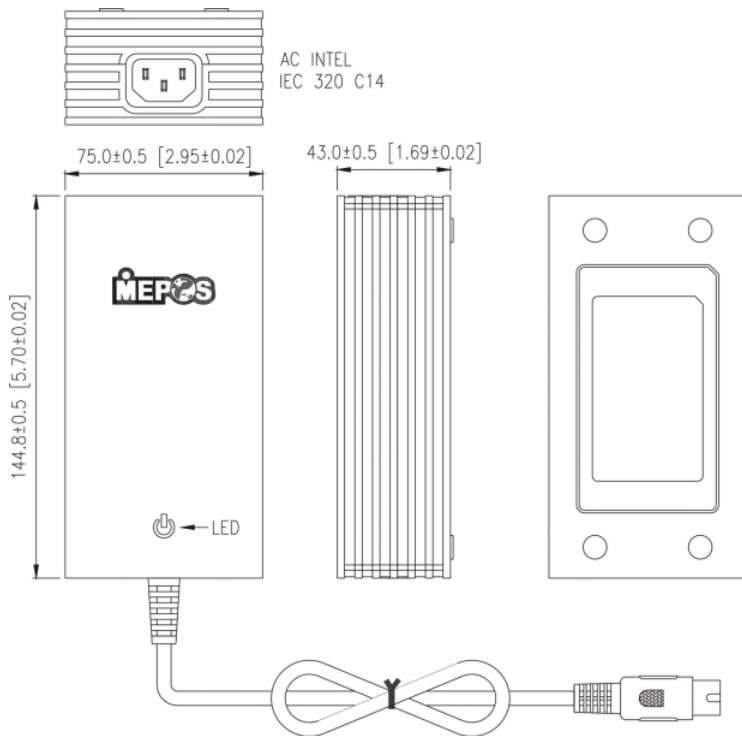

Note:

1. Dimensions are shown in mm & inch
2. Weight: 450g approx
(Exclude the input cord)
3. Optional output connector.