

## SHDA100 SERIES



## 100W Desktop Power Supply for Medical Equipment

- Wide Input Voltage 90 to 260 VAC, 47 to 63Hz,
- Active Power Factor Correction
- IEC-320-C14 input inlet
- Output Voltage Available From 11VDC Thru 48VDC
- Single Output
- Class I Insulation
- Input Surge Current, Over Voltage, Over Load and Output Voltage protection.
- Energy Star 2.0, CEC V, and RoHS Compliance

2 Year Warranty



### Single Output

Product Number	Output Voltage	Max. Output Current	Total Regulation	Maximum Output Power
SHDA100-S05	11 ~ 13 VDC	9.09 ~ 7.69 A	5%	100W
SHDA100-S06	13 ~ 16 VDC	7.69 ~ 6.25 A	4%	100W
SHDA100-S07	16 ~ 21 VDC	6.25 ~ 4.76 A	4%	100W
SHDA100-S08	21 ~ 27 VDC	4.76 ~ 3.70 A	4%	100W
SHDA100-S09	27 ~ 33 VDC	3.70 ~ 3.03 A	3%	100W
SHDA100-S11	40 ~ 48 VDC	2.50 ~ 2.08 A	3%	100W

The total regulation each model is required to use AWG#18/3C+AWG16/3C/4FT output cable

The regulation will be changed by modified output cable.

### Electrical Characteristics

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Input Voltage	Operating Voltage	90		260	VAC
Input Frequency		47		63	Hz
Power Factor Correction	Io=Full load, Vin=230 VAC	0.95		1	
Output Power Range	Vin= 90 to 264 VAC	0		100	W
Input Current (Low Line)	Io=Full load, Vin=115 VAC			1.35	A
Input Current (High Line)	Io=Full load, Vin= 230 VAC			0.5	A
Low Line Inrush Current	Io=Full load, 25°C, Cool start, Vin=115VAC		44	50	A
High Line Inrush Current	Io=Full load, 25°C, Cool start, Vin=230 VAC		85	100	A
Efficiency	Io=Full Load, Vin=230VAC		87	90	%
Line Regulation	Io=Full Load		0.5	1	%
Load Regulation	Vin=230VAC		3	5	%
Over Voltage Protection		112		132	%
Over Current Protection		110		150	%
Transient Response	Io=Full Load to Half Load, Vin=100VAC			4	mS
Hold-Up Time	Io=Full Load, Vin=110VAC	12			mS
Start Up Time	Io=Full Load, Vin=100VAC	0.3	1.5	2	S
* Ripple & Noise (Peak to Peak)	Full Load, Vin=90VAC		0.5	1	%
Safety Ground Leakage Current	Io= Full Load, Vin=240VAC		0.15	0.25	mA
No-Load Power Consumption	No load, Vin=240VAC			0.5	W
Temperature Coefficient	All output	-0.04		0.04	%/°C


## Conditions

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Operating Temperature		0	40	70	°C
Storage Temperature		-40		85	°C
Relative Humidity		5		95	%
Operation temperature at 25°C, calculated per MIL-HDBK-217F		0.1M			Hrs
Derate linearly from 100% load at 40°C to 50% load at 70°C					

## Approvals and Compliances

Parameter	Test Conditions	Min.	Unit
Dielectric Withstanding Voltage for Primary to secondary	Primary to secondary	5656	VDC
Dielectric Withstanding Voltage for Primary to Ground	Primary to ground	2828	VDC
Isolation Resistance	Test Voltage = 500VDC	50	MΩ
EMI requirements for CISPR-11	Vin=230VAC	B	CLASS
EMI requirements for FCC PART-18	Vin=120VAC	B	CLASS

## Mechanical and PIN out

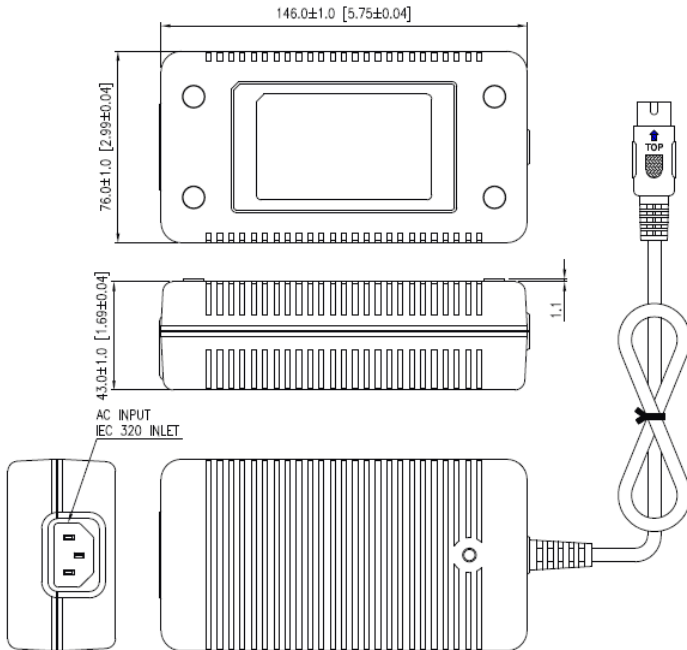

### Note:

1. Dimensions are shown in mm & inch
2. Weight: approx. 490-670gs  
(Exclude the input cord)
3. Optional output connector.