

## EC5SAW SERIES 10 WATT WIDE INPUT DC-DC CONVERTERS



### FEATURE

- \* 4:1 Input Range
- \* Regulated Outputs
- \* 3000VDC/2000VAC Isolation
- \* Efficiency Up to 89.5%
- \* Compact SIP8 Package
- \* Remote On/Off Control
- \* 6.6-10W Isolated Output
- \* Fixed Switching Frequency
- \* No Tantalum Capacitor Inside
- \* Input Under-Voltage Protection
- \* Low No Load Power Consumption
- \* Continuous Short Circuit Protection



MODEL NUMBER	INPUT VOLTAGE(4)	OUTPUT VOLTAGE	OUTPUT CURRENT		INPUT CURRENT		%EFF.		CAPACITOR LOAD MAX.
			MIN.	MAX.	NO LOAD	FULL LOAD	(3)	(2)	
EC5SAW-24S33N	9-36 VDC	3.3 VDC	0 mA	2000 mA	6 mA	336 mA	81	81.5	2000uF
EC5SAW-24S05N	9-36 VDC	5 VDC	0 mA	2000 mA	6 mA	490 mA	83.5	85	2000uF
EC5SAW-24S12N	9-36 VDC	12 VDC	0 mA	833 mA	6 mA	473 mA	87	89	833uF
EC5SAW-24S15N	9-36 VDC	15 VDC	0 mA	666 mA	6 mA	468 mA	88.5	89.5	666uF
EC5SAW-24D05N	9-36 VDC	±5 VDC	0 mA	±1000 mA	6 mA	490 mA	84	85	1000uF
EC5SAW-24D12N	9-36 VDC	±12 VDC	0 mA	±417 mA	7 mA	468 mA	88.5	89	417uF
EC5SAW-24D15N	9-36 VDC	±15 VDC	0 mA	±333 mA	7 mA	468 mA	88.5	89	333uF
EC5SAW-48S33N	18-75 VDC	3.3 VDC	0 mA	2000 mA	6 mA	168 mA	81	81	2000uF
EC5SAW-48S05N	18-75 VDC	5 VDC	0 mA	2000 mA	6 mA	245 mA	84	85	2000uF
EC5SAW-48S12N	18-75 VDC	12 VDC	0 mA	833 mA	6 mA	237 mA	87.5	88	833uF
EC5SAW-48S15N	18-75 VDC	15 VDC	0 mA	666 mA	6 mA	234 mA	87.5	88	666uF
EC5SAW-48D05N	18-75 VDC	±5 VDC	0 mA	±1000 mA	6 mA	245 mA	84	85	1000uF
EC5SAW-48D12N	18-75 VDC	±12 VDC	0 mA	±417 mA	6 mA	234 mA	88	88	417uF
EC5SAW-48D15N	18-75 VDC	±15 VDC	0 mA	±333 mA	6 mA	234 mA	87.5	88	333uF

#### NOTE:

1. Nominal Input Voltage 24 or 48 VDC
2. Measured at Nominal Input Voltage
3. Measured at 12VDC for 24Vin, 24VDC for 48Vin
4. For 3.3Vo, 5Vo & ±5Vo has Derating by Input is Required Show Fig.1

# SPECIFICATIONS

All Specifications Typical At Nominal Line, Full Load, and 25°C Unless Otherwise Noted

## INPUT SPECIFICATIONS:

Input Voltage Range ..... 24V ..... 9-36V  
 ..... 48V ..... 18-75V  
 Input Surge Voltage (100 ms max.) ..... 24V ..... 50VDC max.  
 ..... 48V ..... 100VDC max.  
 Input Filter ..... Capacitive  
 Remote On/Off Control:  
     Module On ..... Open or High Impedance  
     Module Off ..... 2mA to 4mA  
     Module Off (Input Idle Current) ..... 2.5mA max.

## OUTPUT SPECIFICATIONS:

Voltage Accuracy ..... ±1.0% max.  
 Voltage Balance (Dual) ..... ±1.0% max.  
 Transient Response: 75%~100% Step Load Change  
     Error Band ..... ±5% Vout Nominal, Recovery Time ..... < 250µs  
 Ripple & Noise, 20MHz BW (Note 5) ... 3.3V & 5V & ±5V ... 100mV pk-pk max.  
     12V/15V/±12V/±15V ..... 1%Vo max.  
 Temperature Coefficient ..... ±0.02%/°C max.  
 Short Circuit Protection ..... Continuous  
 Line Regulation (note1) ..... ±0.2% max.  
 Load Regulation (note2) ..... ±1.0% max.  
 Cross Regulation (Dual note3) ... Asymmetrical Load 25%/100% .. ±5.0% max.  
 Current Limit ..... 180% typ.  
 Start up time ..... 5ms typ.

## GENERAL SPECIFICATIONS:

Efficiency ..... See Table  
 Isolation Voltage ..... Input/Output ..... 3000VDC min.  
     Input/Output ..... 2000VAC min.  
 Isolation Resistance ..... 10<sup>9</sup> ohm min.  
 Isolation Capacitance ..... 50pF max.  
 Switching Frequency ..... 530KHz typ.  
 Operating Ambient Temperature ..... -40°C to +85°C  
 De-rating, Above 50°C ..... Linearly to Zero power at 105°C  
 Case Temperature (note4) ..... 105°C max.  
 Cooling ..... Natural Convection


Storage Temperature ..... -55°C to +125°C  
 Humidity ..... 95% RH max. Non condensing  
 MTBF .... MIL-HDBK-217F, GB, 25°C, Full Load ..... 1930Khrs typ.  
 Dimensions ..... 0.87x0.37x0.47 inches (22.0x9.5x12.0mm)  
 Case Material ..... Non-Conductive Black Plastic  
 Weight ..... 4.9g

## NOTE:

1. Measured from high line to low line.
2. Measured from full load to no load.
3. For asymmetric loading, both channels must be at 25% load or more.
4. Maximum case temperature under any operating condition should not be exceeded 105°C.
5. Output ripple and noise measured with 1µF ceramic capacitor

## CASE SA DIMENSIONS:

All Dimensions In Inches (mm)  
 Tolerances : Inches      Millimeters  
                   X.XX=±0.02    X.X=±0.5  
 Pin            ±0.002            ±0.05

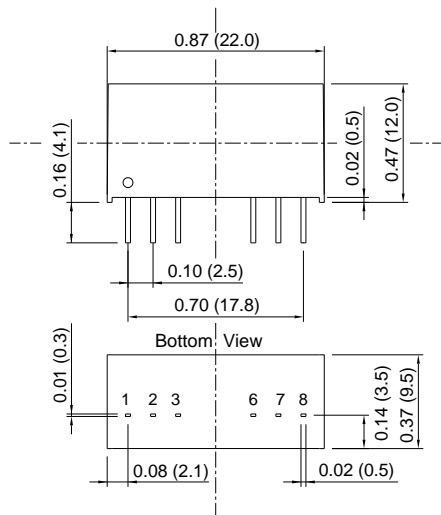

PIN CONNECTION		
Pin	Single	Dual
1	-V Input	-V Input
2	+V Input	+V Input
3	On/Off	On/Off
6	+V Output	+V Output
7	-V Output	Common
8	NC	-V Output

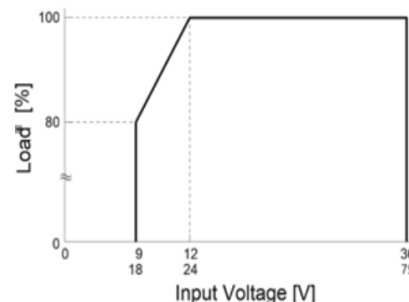


Fig1. Input Voltage Derating Curve  
 Typical Derating curve for Natural Convection

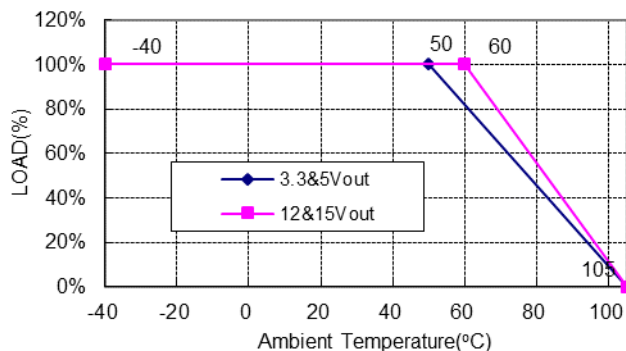


Fig2. Typical Derating Curve for Naturel Convection