




FM SERIES 10 AMP FILTER MODULE



FEATURES

- * Half Brick Size Meet Industrial Standard
- * PCB Mount
- * 10A Filter Module
- * 200VDC Input Voltage Maximum
- * All capacitor are multi-layer ceramic
- * Fire & Smoke Meets EN45545-2

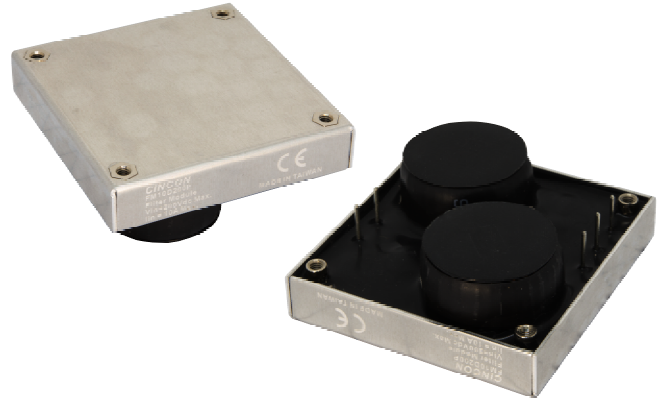

MODEL NUMBER	INPUT VOLTAGE	INPUT SURGE VOLTAGE	OUTPUT RATED CURRENT	DC RESISTANCE (+Vin to +Vo)	DC RESISTANCE (-Vin to -Vo)
FM10D200P	200 VDC max.	250 VDC max.	10 A max.	50 mΩ typ.	50 mΩ typ.

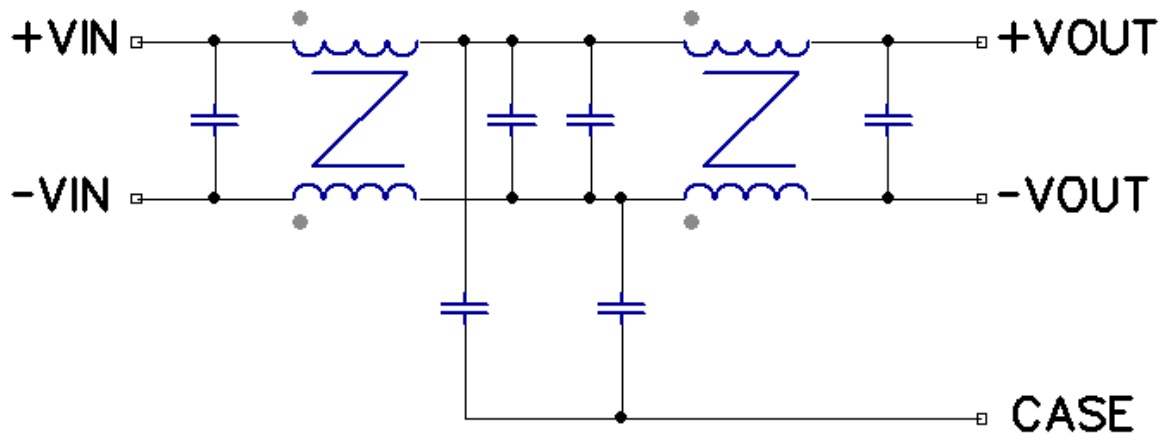


Figure1 Internal Schematic for FM10D200P Module

SPECIFICATIONS

All Specifications Typical At Nominal Line, Full Load, and 25°C Unless Otherwise Noted

INPUT SPECIFICATIONS:



Input Voltage Range 200Vdc max.
 Input Surge Voltage 250Vdc/1s
 Input Rated Current (note 1) 10A max

GENERAL SPECIFICATIONS:


Isolation Voltage Input/Output/Case 3000Vdc min.
 Isolation Resistance $10^8 \Omega$ min.
 DC Resistance See Table
 Operating Case Temperature Range (note 1) -40°C to +110°C
 Storage Temperature Range -55°C to +105°C
 Dimensions 2.28x2.40x0.97 inches (57.9x 61x24.6 mm)
 Case Material Aluminum Case with Silicone Potting
 Weight 128g

NOTE :


- Maximum case temperature under any operating condition should refer derating curve

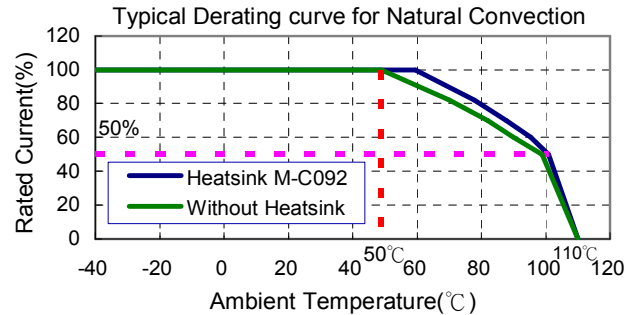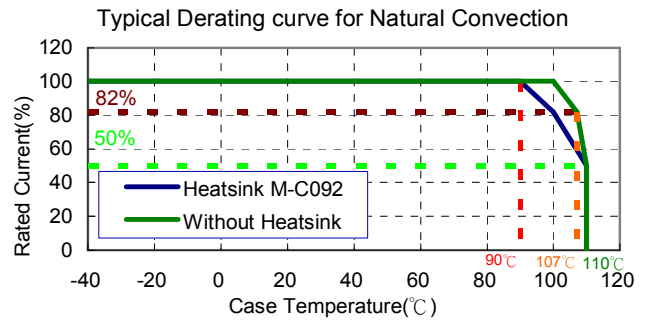

Common-Mode Insertion Loss

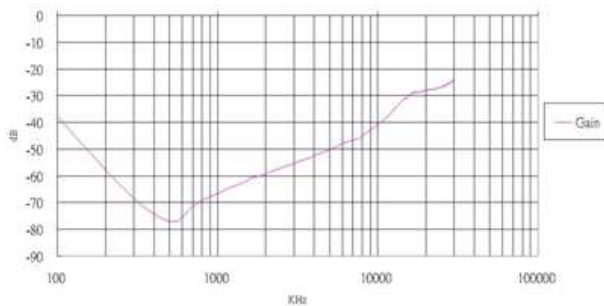



Differential-Mode Insertion Loss

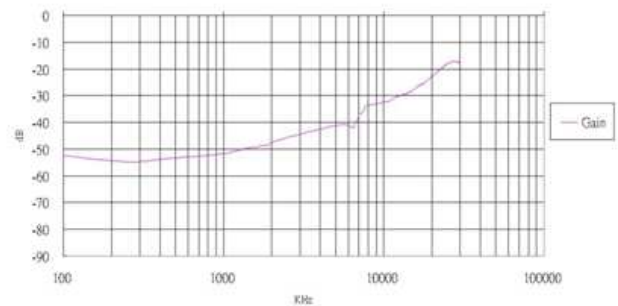

Typical Common-mode and Differential-mode Loss for FM10D200P

NOTE: Pin Size is 0.04±0.004 Inch (1.0±0.1mm) DIA
 All Dimensions In Inches[mm]
 Tolerance Inches: x.xx = ± 0.02 , x.xxx = ± 0.010
 Millimeters: x.x = ± 0.5 , x.xx = ± 0.25

Mounting Inserts
 M3*0.5 Through 4pl.

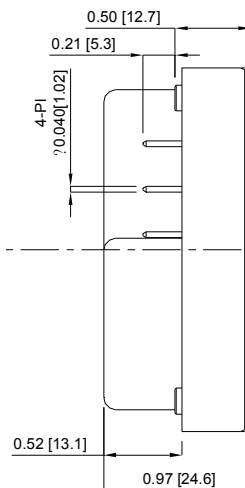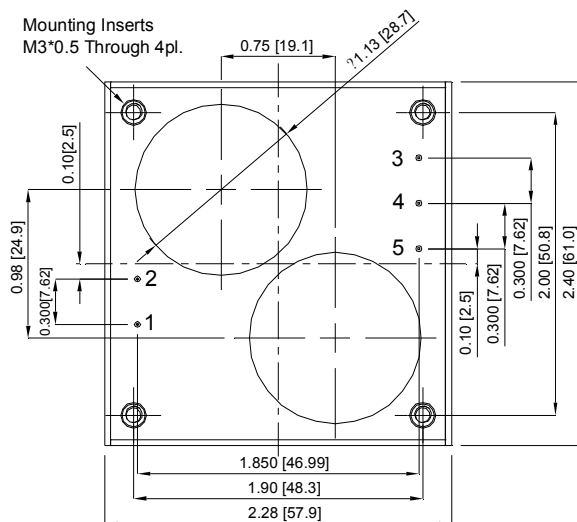

PIN CONNECTION

Pin	Function
1	+V Input
2	-V Input
3	CASE
4	-V Output
5	+V Output