

ULTRAVOLT XS SERIES

EXTRA-SMALL HIGH VOLTAGE BIASING SUPPLIES



The UltraVolt® XS series of extra-small high voltage power supplies is the smallest regulated DC-to-DC high voltage power supply for applications that require a bias voltage ranging from 0 to 100 V. Measuring only 1.3 cc (0.08 in³), these modules are ideal for use in size-critical applications.

PRODUCT HIGHLIGHTS

- Extra-small size: 1.3 cc
- Lightweight: 5 g
- PCB flat mounting: 11 mm height
- Output from 0 to 100 V
- 100 mW output power
- Low ripple (< 50 mV peak to peak)
- Tight line/load regulation < ±0.01%
- Low temperature coefficient < ±50 ppm per °C
- Programmable HV output ±2.0% F.S.
- Output current limit protection
- 5 or 9 VDC input
- Metal case for low radiated noise

TYPICAL APPLICATIONS


- Small, lightweight, portable devices
- Thin-film bias
- Avalanche photo diodes (APD)
- Silicon photomultipliers (SiPM)
- Multi-pixel photon counters (MPPC)
- Ultrasonic transducers
- Small PZT drivers
- ATE leakage testing
- Bias supplies

ULTRAVOLT XS SERIES

ELECTRICAL SPECIFICATIONS

Parameter	Specifications	Units
Input Voltage V_{in} (Pins 1 and 2)	5 VDC \pm 0.5 (recommended) max: 12 VDC (reverse: -0.2 V)	VDC
Input Current	For 0 V output voltage: < 1.6	mA
	For 100 V, no load: < 3	
	At full output voltage, full load: < 50	
HV Output V_{out} (Pin 4)	0 to 100 programmable	VDC
Output Power	0 to 100	mW
Polarity	Fixed positive or negative	-
HV Setting (Pin 3)	Via external voltage source 0/2.5 V	-
	Accuracy: \pm 2% at full scale	
Max Output Current I_{out}	1 nominal	mA
Load Voltage Regulation	\pm 0.01% of full output voltage for no load to full load	-
Line Voltage Regulation	\pm 0.01% of full output voltage over specified input voltage range	-
Residual Ripple	< 50 mV pk to pk — ripple can be reduced to < 10 mV by adding an external 100 nF small CMS capacitor	-
Temperature Coefficient	< 50	PPM/ $^{\circ}$ C
Output HV Monitoring	N/A	-
Output Reference Voltage	N/A	-
HV Power ON/OFF	N/A	-
Operating Temperature	-10 to +65, full load, max E_{out} , case temp.	$^{\circ}$ C
Storage Temperature	-10 to +70	$^{\circ}$ C
Safeguards	Output current internally limited	-
	Soft start feature: low overshoot	
Shielding	Ground return is to metal enclosure	-

MECHANICAL SPECIFICATIONS

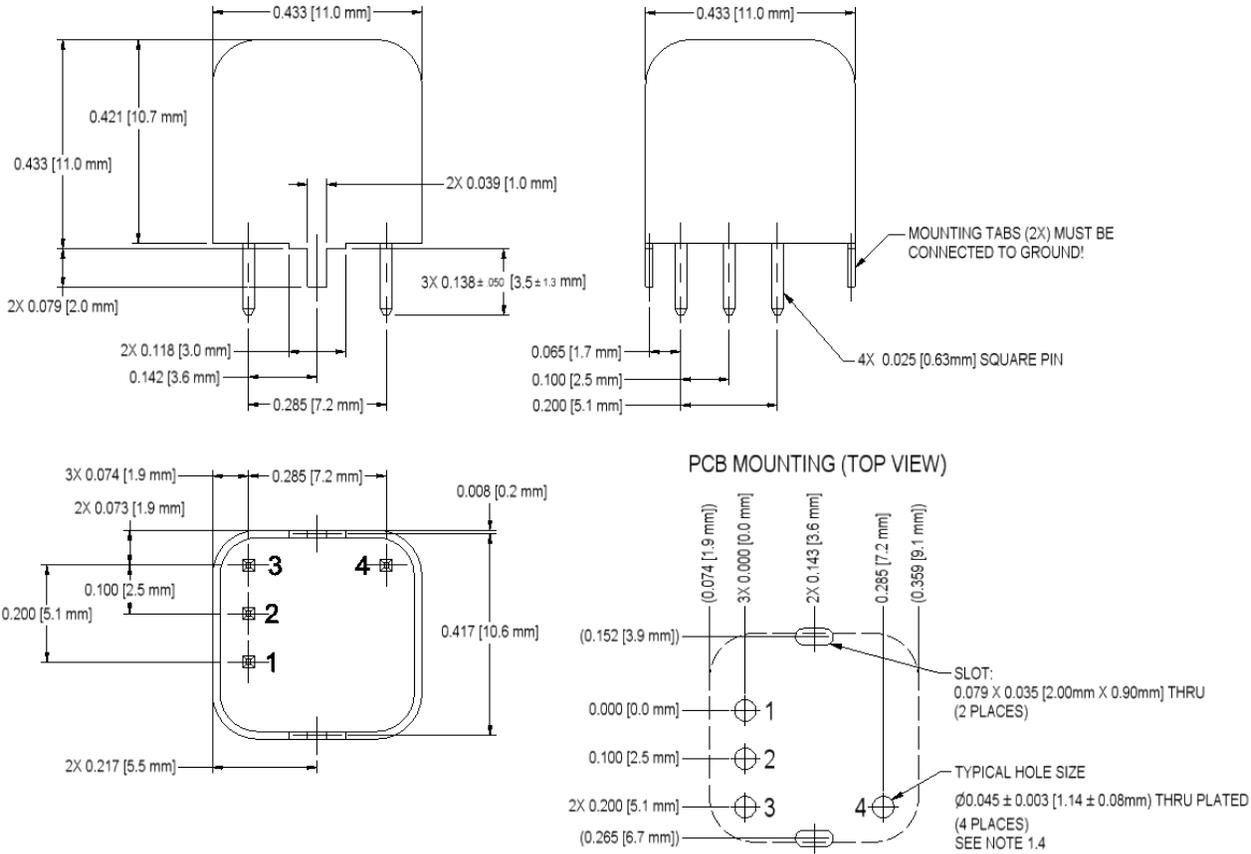

Drawing views: third angle projections.

Construction	
Casing	Steel, tin-plated, thickness 0.5 mm (0.02")
Insulation	Fully potted in RTV
Pins	
Gold-plated	0.63 mm (0.025") square
Length	> 2 mm (0.079")
Spacing	2.54 mm (0.1")
Volumes and Weights	
Volume	1.331 cc (0.081 in ³)
Weight	5 g (0.176 oz)

ULTRAVOLT XS SERIES

INTERFACE

Connections

Pin	Function
1	Positive Power Input
2	Ground Return
3	Remote Adjust Input
4	HV Output


Mounting tabs must be connected to ground.

ORDERING INFORMATION

Type	0 to 100 VDC Output	0.1XS
Input	5 VDC Nominal	5
Power	W Output	0.1
Case	Steel, Tin-plated	(Standard)
Polarity	Positive Output	-P
	Negative Output	-N

Popular accessories ordered with this product include the PCB-CONN-XS.

The XS series is not available in all territories. Please contact Advanced Energy for details concerning sales in your area.

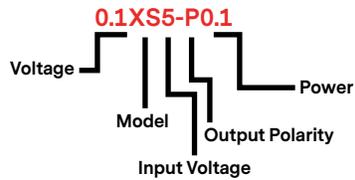



For international contact information,
visit advancedenergy.com.

uv-ca@aei.com
+1.970.221.0108

ABOUT ADVANCED ENERGY

Since 1981, UltraVolt® — now part of the Advanced Energy (AE) family — has perfected how power performs for its customers. For both end users and OEMs, AE's comprehensive portfolio of standard and custom high voltage components precisely match system specifications to deliver unparalleled energy, quality, and performance. Through close customer collaboration, design expertise, application insight, and world-class support, AE creates successful partnerships and enables customers to push the boundaries of innovation and stay ahead of evolving market needs.

PRECISION | POWER | PERFORMANCE



CAUTION:
High Voltage

Read and understand all documentation before you install, operate, or maintain Advanced Energy high voltage power supplies. Follow all safety instructions and precautions to protect against property damage and serious or possibly fatal bodily injury. Never defeat safety interlocks or grounds.

Specifications are subject to change without notice. Not responsible for errors or omissions. ©2020 Advanced Energy Industries, Inc. All rights reserved. Advanced Energy®, AE®, and UltraVolt® are U.S. trademarks of Advanced Energy Industries, Inc.