

# ARTESYN $\mu$ MP SERIES GEN II

Up to 1800 Watts with New Product Enhancements



Advanced Energy's Artesyn  $\mu$ MP series GEN II power supply is a configurable power supply with market-leading density and efficiency. It features a very wide 85 to 264 VAC input voltage range and employs active power factor correction to minimize input harmonic current distortion and to ensure compliance with the international EN61000-3-2 standard – they have a power factor of 0.99 typical. The power supplies also feature active AC inrush control to automatically limit inrush current at turn-on to 40 A maximum.

## SPECIAL FEATURES

- Full Medical EN60601 approval
- PMBus monitor/control of input functions
- High efficiency
- Constant current limit protection
- High power density.
  - $\mu$ MP04: 10.8 W/cu-in
  - $\mu$ MP09: 18.5 W/cu-in
  - $\mu$ MP10: 15.1 W/cu-in
  - $\mu$ MP16: 22.9 W/cu-in
- Low noise intelligent fan (speed control/fault status), 36% reduction from GEN I
- Downloadable GUI from website
- Optional conformal coating
- Industrial temp range (-40 °C to 70 °C)
- No preload required

- Military STD shock/vibration (40G's)
- Low cost
- IEC, terminal block or barrier strip input connection options
- Low profile 1U size
- Superior aesthetics over GEN I

## CERTIFICATIONS

- UL UL/CSA 62368-1  
ES60601-1 / CSA 22.2  
No.60601-1
- TUV EN62368-1 / EN60601-1
- CB Certificate and Report
- CE Compliance to LVD and RoHS Directives
- UKCA Mark
- CQC Approved
- Medical 2x MOPP

## AT A GLANCE

### Total Power:

Up to 1800 Watts Peak\*

### Input Voltage:

85 to 264 VAC  
120 to 300 VDC

### # of Outputs:

Up to 12

\* Max output power for  $\mu$ MP16: 1000 W 90 - 100 VAC; 1200 W 100 - 180 VAC; 1600 W 180 - 200 V; 1800 W 200 - 264 VAC. Operational specs for EMI and Hold-up are valid to 1600 W max.



## ELECTRICAL SPECIFICATIONS

Input	
Input range	85 to 264 VAC 120 to 350 VDC (limited to 300 VDC in medical applications)
Frequency	47 to 440 Hz
Inrush current	40 A peak max. (soft start)
Efficiency	Up to 91.5% @ full case load
Power factor	0.99 typ. meets EN61000-3-2 (n/a @ 440 Hz)
Standby power	μMP10/16 < 13 W μMP04/09 < 6 W
Turn-on time	AC on 2 sec for μMP16/10 and 1.5 sec for μMP04/09, inhibit/enable 250 ms typical
EMI:	CISPR 22/EN55022 Level "B" (Both Conducted and Radiated)
Leakage current	<200 uA using center-tapped xfmr measurement method. (<400 uA @ 240 VAC input)
Holdover storage	16.7 ms minimum (independent of input Vac, 0 °C to 50 °C) At 1200 W for μMP16
AC OK	Signal goes low indicating loss of AC input. Hold up = Full cycle ride thru (50 Hz); Open collector
Harmonic current emission	Meets EN61000-3-2
Isolation	Meets EN62368 and EN60601
Global inhibit/enable	TTL, Logic "1" and Logic "0"; fan off when unit is inhibited
Input fuse (internal)	μMP16/10: 16 A, 500 VAC 400 VDC, μMP04/09: 10 A / 250 V. (both lines fused)
Warranty	3 years
Output	
Factory set point accuracy	± 1%
Margining / V-Program	± 3 - 7% nominal analog (single output module only). Contact factory for simple V-program modification (i.e. 0-5 V input = 0-100% output voltage).
Overall regulation	0.4% or 30 mV which ever is greater
Ripple	RMS: 0.1% or 10 mV, whichever is greater Pk-Pk: 1.0% or 50 mV, whichever is greater. Bandwidth limited to 20 MHz
Dynamic response	< ± 5% or 250 mV, with 50% step load, Min 20% load condition
Recovery time	To within 1% in < 300 μsec
Reverse voltage protection	100% of rated output current
Thermal protection (OTP)	All outputs disabled when internal temp exceeds safe operating range
Remote sense	Up to 0.5 V total drop (not available on triple output module)
Single wire parallel	Current share to within 5% of total rated current from 20% to 100% rated load
DC OK	± 5% of nominal Open collector
Minimum load	Not required
Housekeeping standby	5 VDC @ 2.0 A max whenever AC input is applied. 1.0 A (2.0 A for μMP04) max convection cooled (when output is inhibited off)
Module inhibit	Logic - output on with low or open. Different logic options available
Output/Output isolation	> 1 Megohm, 500 VDC

## ENVIRONMENTAL SPECIFICATIONS

Operating temperature	-40°C to 70°C ambient. Derate each output 2.5% per degree from 50°C to 70°C. Cold start soak -20 °C, allow 10 min warm-up before all outputs are within specification. Reverse air to 40 °C Max due to fan derating.
Storage temperature	-40°C to +85°C
Electromagnetic susceptibility	Designed to meet EN61000-4:-3,-5,-6,-11 Class 3 Performance Criteria A
Humidity	Operating; non-condensing 10% to 95% RH
Vibration	MIL-STD-810E
MTBF demonstrated	> 350,000 hours at full load, one $\mu$ MP04 case + two modules, Telcordia SR-332 calculated MTBF
Altitude	Up to 10 K feet; derate linear to 50% from 10 K to 30 K feet

Vout	Full load (A)	OVP trip max (V)	OCP trip typ (Iout%)	SCP trip max (Iout%)	Overshoot (max mV)	Peak Deviation (max mV)
<b>3 V 3 Module</b>						
0.9	40	2.00 V	130%	160%	150	± 250
3.3	40	5.96 V	130%	160%	250	± 250
3.6	40	6.31 V	130%	160%	250	± 250
<b>5 V Module</b>						
3.2	36	5.76 V	130%	160%	250	± 250
5	36	9.0 V	130%	160%	250	± 250
6	30	10.80 V	130%	160%	300	± 300
<b>12 V Module</b>						
6	25	10.80 V	130%	160%	300	± 300
12	20	15.60 V	130%	160%	600	± 600
15	16	19.50 V	130%	160%	750	± 750
<b>24 V Module</b>						
12	13	15.60 V	130%	160%	600	± 600
24	10	31.20 V	130%	160%	120	± 1200
30	8	39.00 V	130%	160%	1500	± 1500
<b>48 V Module</b>						
28	7	36.40 V	130%	200%	1400	± 1400
48	5	62.40 V	130%	160%	2400	± 2400
60	4	78.00 V	130%	200%	3000	± 3000

## CASE LINE-UP

Case	Max Output		Dimensions	Connections	Max Continuous Current
	85-180 VAC	180-263 VAC			
μMP04 - 4 Slot	400 W	600 W	256.9 x 88.9 x 40.0 (10.11" x 3.5" x 1.57")	IEC, Terminal-Block, Barrier-Strip	9.91
μMP09 - 4 Slot	550 W	1100 W	256.9 x 88.9 x 40.0 (10.11" x 3.5" x 1.57")	IEC, Terminal-Block, Barrier-Strip	9.91
μMP10 - 6 Slot	1000 W	1200 W	256.9 x 127 x 40.0 (10.11" x 5.0" x 1.57")	IEC, Terminal-Block, Barrier-Strip	13.87
μMP16 - 6 Slot	1000 W	1800 W	256.9 x 127 x 40.0 (10.11" x 5.0" x 1.57")	IEC, Terminal-Block, Barrier-Strip	13.87

## OUTPUT MODULE LINE-UP S2\*

Output Range (Vdc)	Max Current (Amps)	Max Power (Watts)	Module Codes Standard Outputs
0.9 to 3.6	40	144	A, B, C, D - 2, 2.2, 3, 3.3
3.2 to 6.0	36	180	E, F, G, H - 5, 5, 2, 5.5, 6.0
6.0 to 15.0	25	240	I, J, K, L, M, N - 8, 10, 11, 12, 14, 15
12.0 to 30.0	13	240	O, P, Q, R, S - 18, 20, 24, 28, 30
33.0 to 60.0	7	240	T, U, V, W, X, Y - 33, 36, 42, 48, 54, 60
3.3 to 30.0	4/4	96/96	Dual Output Module. Each output is rated to 96 W (192 Watts total). Wide range is adjustable.

## DC OUTPUT MODULE RATING (SK\*) 3-SLOTS

Output (Vdc)	MAX Current (Amps)	MAX Power (Watts)	Modules Codes (*) Standard Outputs
6.0 to 15.0	84	1000	H, I, J, K, L, M, N - 6, 8, 10, 11, 12, 14, 15
12.0 to 30.0	42	1000	O, P, Q, R, S - 18, 20, 24, 28, 30
28.0 to 60.0	21	1000	T, U, V, W, X, Y - 33, 36, 42, 48, 54, 60

## INTERNAL PART NUMBER REFERENCE TABLE

Part #	Where X =	Description	Module Code
73-951-0001X-G2	T, C, S	μMP10 Cases	μMP10
73-956-0001X-G2	T, C, S	μMP16 Cases	μMP16
73-963-XXXX	0012, 0024, 0048, 04XX	uMP 1000W Module	SKL to SKZ
73-963-00XX-G2	0012, 0024, 0048, 04XX	uMP 1000W Module	SKL to SKZ

## ORDERING INFORMATION

$\mu$ MPXY	SKW - S2E - S2Q - ILL	00	A	###
<p><b>Case Size</b></p> <p>1-Phase Input where X =            04 = 1.57" x 3.5" x 10.0"; 400W - 600W 4 Slots            09 = 1.57 x 3.5 x 10.0, 550W-1100W 4 Slots            10 = 1.57 x 5.0" x 10.0", 1000W-1200W, 6 Slots            16 = 1.57" x 5.0" x 10.0", 1200W-1800W**, 6 Slots</p> <p>** See Output derating table below for <math>\mu</math>MP16</p> <p>Input Type where Y =            T = Terminal Block            C = IEC Connector C14            S = Barrier Strip</p>	<p>Module Codes:            S2 = 200 W Single O/P (1 Slot)            SK = 1000 W Single O/P (3 Slot)            I = 96 W Dual O/P ISO GND (1 Slot)            HUP = Hold-Up Module            (10ms for 500W /1 Slot)</p> <p><b>Voltage Codes: See voltage code table</b></p>	<p>First digit            0-9 = Parallel Code</p> <p>Second Digit            0 = No Options            1 = Reverse Air            2 = Not Used            3 = Global Enable            5 = Opt 1 + Opt 3</p>	<p>Factory assigned for modified standards</p>	

## $\mu$ MP16 OUTPUT POWER DERATING

Parameter	85 - 99 Vac	100 - 140 Vac	180 - 199 Vac	200 - 264 Vac
Designed For	1000 W	1200 W	1600 W	1800 W
QAV Evaluation	1000 W	1200 W	1600 W	1800 W
Safety Label and Evaluation	1000 W	1000 W	1600 W	1600 W

## PARALLEL CODES

Code	Slots in Parallel	Code	Slots in Parallel	Code	Slots in Parallel	Code	Slots in Parallel
1	1&2	6	1&2&3	A	1&2; 3&4	0	no module in parallel
2	2&3	7	1,2,3&4	B	1,2&3; 4&5	H	3,4&5
3	3&4	8	1,2,3,4&5	C	1,2,3&4; 5&6	J	3,4,5&6
4	4&5	9	1,2,3,4,5&6	D	1&2; 3&4; 5&6	K	4,5&6
5	5&6			E	1,2&3; 4,5&6		

**Notes:**

Parallel between SK\* (1000 W Modules) and S2\* (240 W Modules) will use the codes as follows

Code 3 to parallel 2 SK\* modules



Code 3 to parallel 1 SK\* module and 1 S2\* module

Code H to parallel 1 SK\* module and 2 S2\* modules


## VOLTAGE CODES

Standard Output Ratings					
Module Output Voltage Code		Single Output One Slot 240 Watts Max	Single Output Three Slots 1000 Watts Max	Dual Output One Slot 96 Watts	
Module Identification		S2	SK	I	
Code	Volts	Output Current V1	Output Current V1	Output Current	
				V1	V2
A	2.0	40.0	-	NA	
B	2.2	40.0	-	NA	
C	3.0	40.0	-	NA	
D	3.3	40.0	-	4.0	4.0
E	5.0	36.0	-	4.0	4.0
F	5.2	34.0	-	4.0	4.0
G	5.5	32.0	-	4.0	4.0
H	6.0	30.0	84.0	4.0	4.0
I	8.0	25.0	84.0	4.0	4.0
J	10.0	24.0	84.0	4.0	4.0
K	11.0	22.0	84.0	4.0	4.0
L	12.0	20.0	84.0	4.0	4.0
M	14.0	17.0	71.4	4.0	4.0
N	15.0	16.0	66.7	4.0	4.0
O	18.0	13.0	42.0	4.0	4.0
P	20.0	12.0	42.0	4.0	4.0
Q	24.0	10.0	42.0	4.0	4.0
R	28.0	8.6	35.7	3.4	3.4
S	30.0	8.0	33.3	3.2	3.2
T	33.0	7	21.0	NA	
U	36.0	6.7	21.0	NA	
V	42.0	5.7	21.0	NA	
W	48.0	5.0	21.0	NA	
X	54.0	4.4	18.5	NA	
Y	60.0	4.0	16.7	NA	

**DERATING CURVES - MP10**

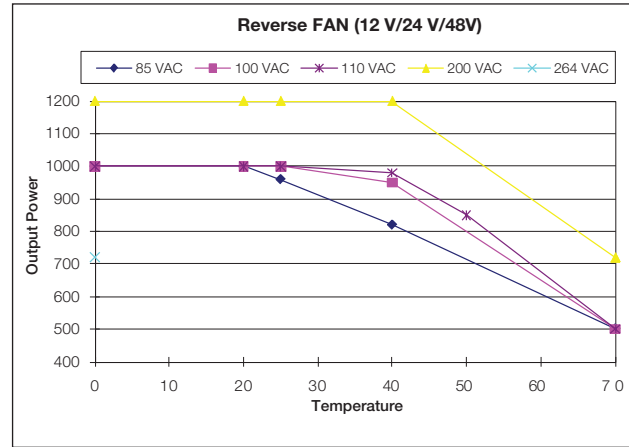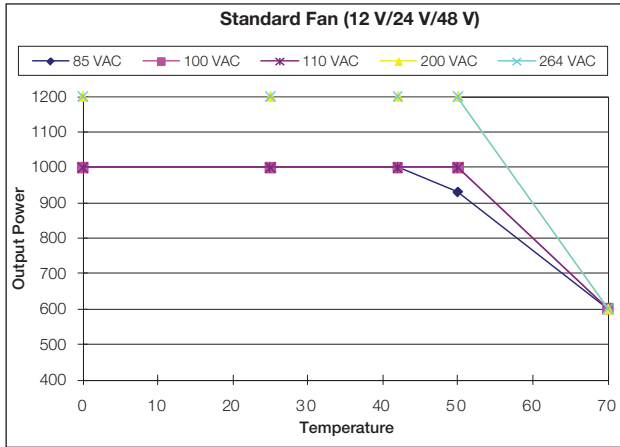


**μMP04/09 (AC input on opposite side)**



μMP04 = 4 available slots  
μMP09 = 4 available slots

Input  
85 - 264 VAC      200 - 264 VAC  
400 W max.      600 W max.  
550 W max.      1100 W max.

**μMP10/16 (AC input on opposite side)**

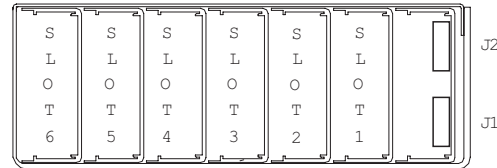

μMP10 = 6 available slots  
μMP16 = 6 available slots

Input  
85 - 264 VAC      200 - 264 VAC  
1000 W max.      1200 W max.  
1200 W max.      1800 W max.

## PIN CONNECTORS

Figure 1. AC Input



IEC Connector



Terminal Block

PEN L

AC Input	
Pin	Function
1	AC neutral
2	AC line (hot)
3	Chassis (earth) ground

Mates with  
Landwin 2050S1000 Housing  
2053T011V Pin  
or  
JST PHDR-10VS Housing  
JST SPHD-002T-P0.5 (28-24)  
JST SPHD-001T-P0.5 (26-22)

J2

I <sup>2</sup> C Bus Output Connector	
Pin	Function
1	5 Vcc bus
2	Serial data signal (SDA)
3	Secondary return (COM)
4	Serial clock signal (SCL)
5	Address bit 2 (A2)
6	No connection
7	Address bit 1 (A1)
8	No connection
9	Address bit 0 (A0)
10	No connection

J1

PFC Input Connector (control & signals)	
Pin	Function
1	Input AC OK - "emitter"
2	Input AC OK - "collector"
3	Global DC OK - "emitter"
4	Global DC OK - "collector"
5	Spare
6	Global inhibit/optional enable logic "1"
7	Global inhibit/optional enable logic "0"
8	Global inhibit/optional enable return
9	+5 VSB housekeeping
10	+5 VSB housekeeping return

Connector Kit Part No.:  
70-841-023






Figure 2. Connector J1 & J2

## S2 MODULE

240 W

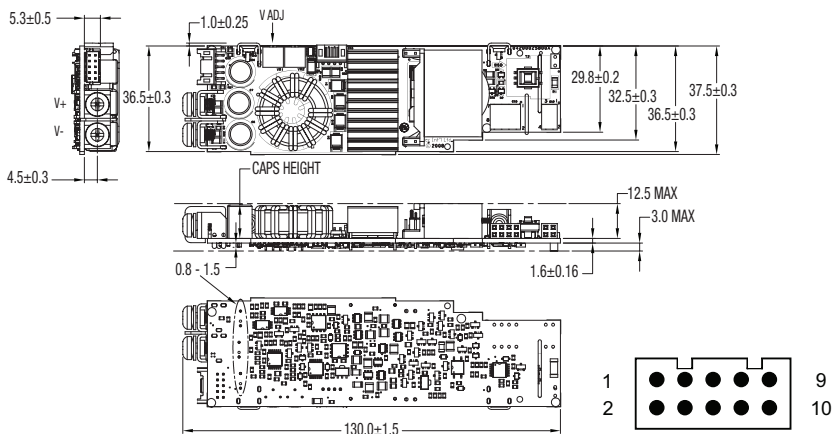
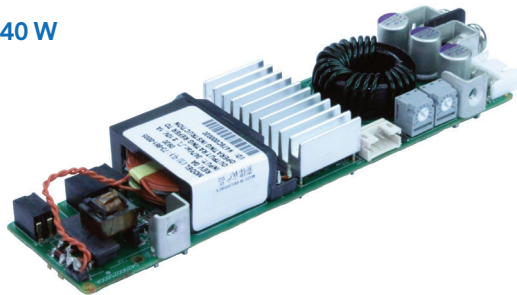


DC Output Control & Signals (Single output)


Pin	Function
1	No connection
2	No connection
3	Current share
4	Module inhibit return
5	Module ISO inhibit
6	SCOM
7	-RMT sense
8	Margin
9	Remote margin / V prog.
10	+RMT sense

**SK MODULE**

**1000 W 48 V Outputs**

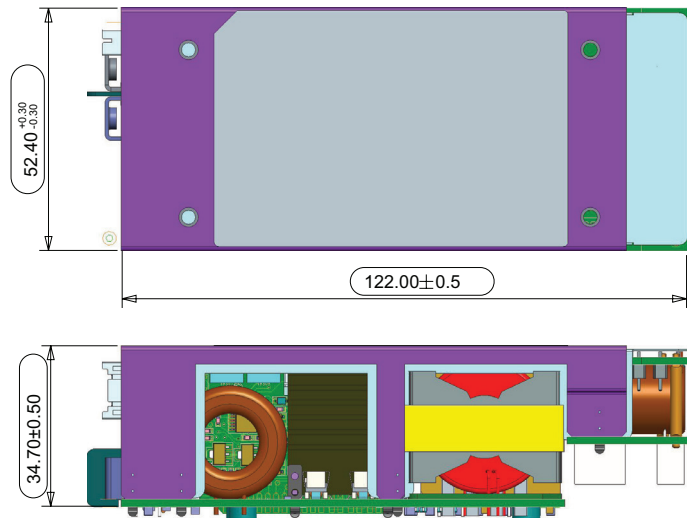
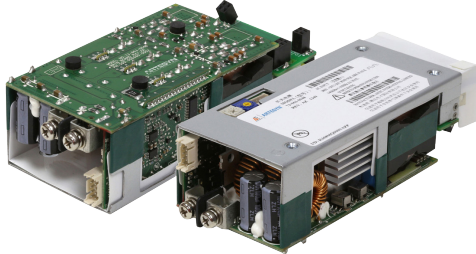


**1000 W 12/24 V Output:**

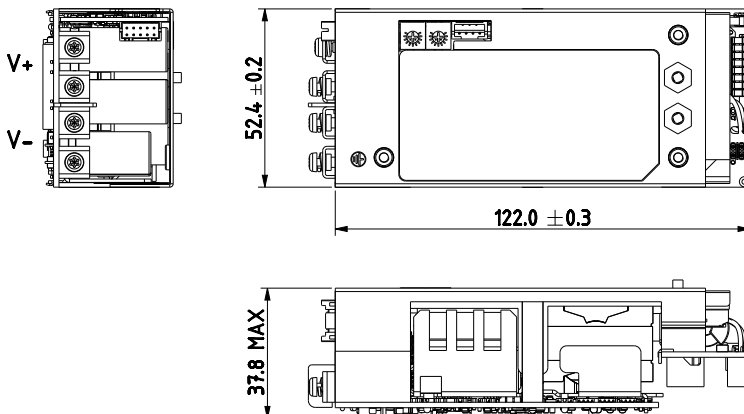

DC Output Control & Signals (Single output)	
Pin	Function
1	No connection
2	No connection
3	Current share
4	Module inhibit return
5	Module ISO inhibit
6	SCOM
7	-RMT sense
8	Margin
9	Remote margin / V prog.
10	+RMT sense

**DUAL MODULE**

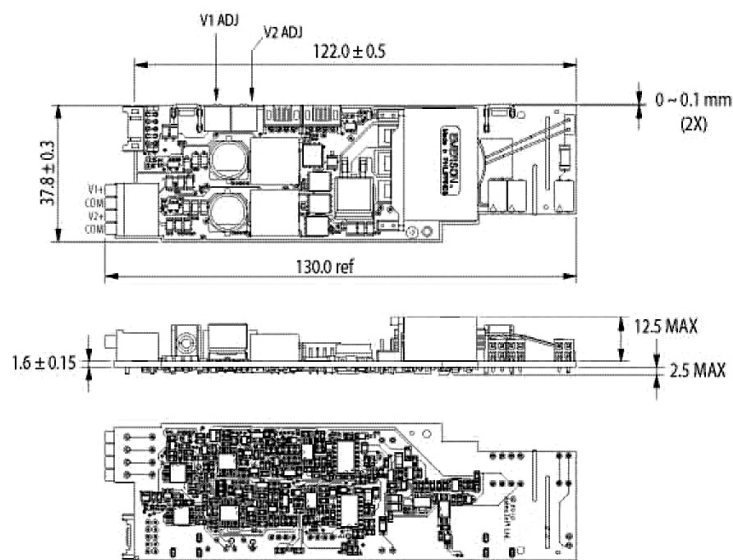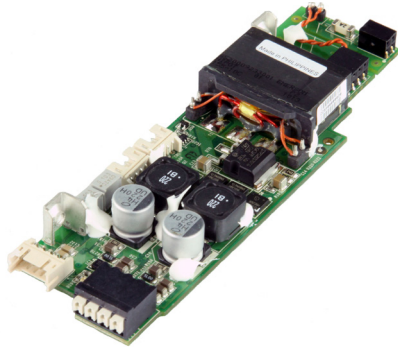

**DC Output Control & Signals (Dual output)**

Pin	Function
1	-RMT sense V2
2	+RMT sense V2
3	No connection
4	Module inhibit rtn
5	Module ISO inhibit
6	SCOM
7	-RMT sense V1
8	No connection
9	No connection
10	+RMT sense V1


## µMP SERIES

### µMP04/09 (400/600; 550/1100 Watts Max)

Case Size: µMP04/09: 10.11" x 3.5" x 1.57" (256.9 mm x 88.9 mm x 40.0 mm)

Weight: µMP04/09 Case: 1.96 lbs · Single O/P: 0.22 lb.

· Dual O/P: 0.16 lb. · Blank: 0.06 lb.

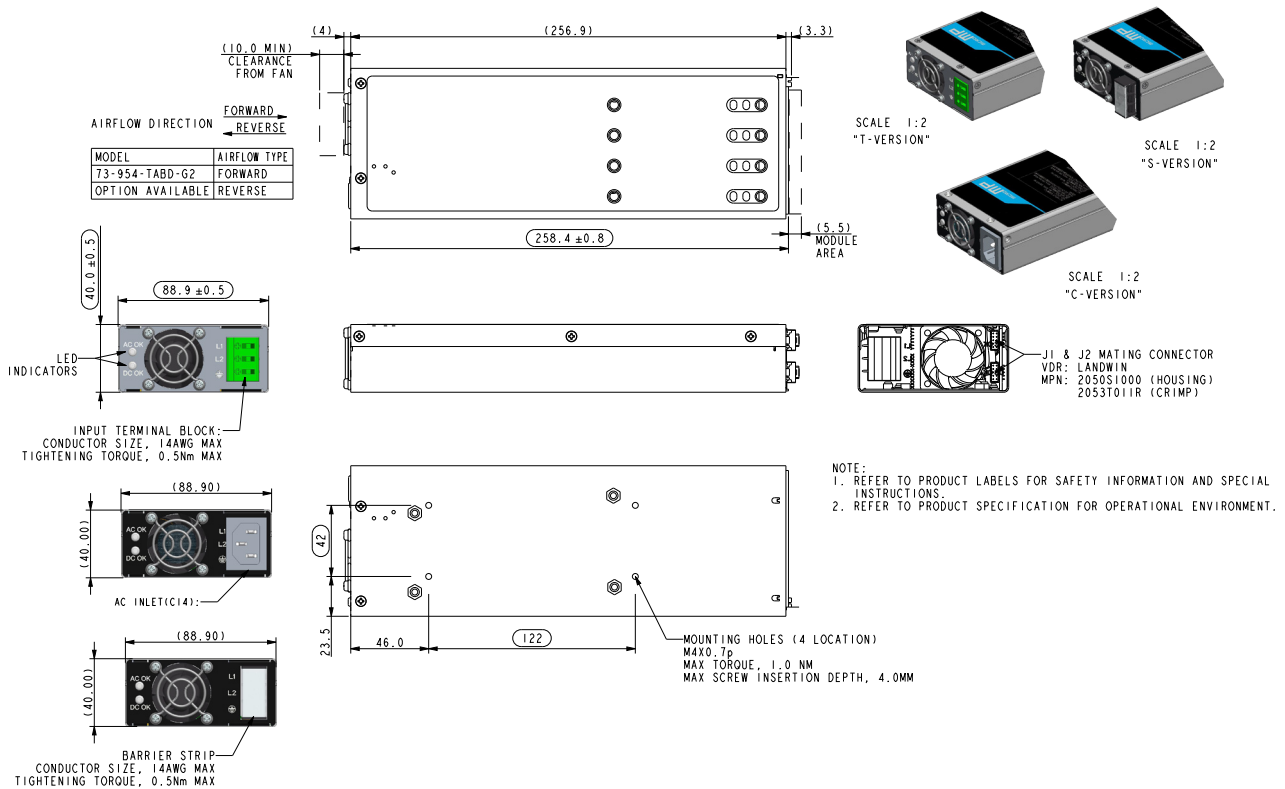

#### Notes:

- Input: IEC 60320 C13 (for IEC connector)  
Barrier Type DECA Switchlab MT300-50003 (for terminal block connector); Max Torque: 4.0 lb-in (0.4 - 0.5 Nm); Wire: 12 - 16 AWG; Wire Strip Length: 0.354" (9.0 mm)
- Control Connectors (J1 and J2): 10-position housing, brass, matte tin-plated contacts. Mates with housing 2050S1000 (Landwin) with 2053T011P (Landwin) pins or housing PHDR-10VS (JST) and SPHD-002T-PO.5 (JST) pins.
- Output Module Connectors: All single O/P modules are M4 x 10 mm screws; tighten between 6.94 to 8.68 lb-in (8.0 to 10.0 kg-cm). Dual O/P module is PUSH IN conductor connector; Wire Strip Length: 0.315" (8.0 mm); Control signal connector: Refer to Item 2.
- Chassis Material: Steel with chemical film coating (conductive).
- Customer Mounting: Screw M4-type mounting holes; Max. Penetration is 0.138" (3.5 mm); Max. Torque: 8.85 lb-in (1.0 N-m)
- All dimensions are in millimeters and inches, and are typical.

## μMP SERIES (CONTINUED)



### μMP10 (1000/1200 Watts Max)

### μMP16 (1200/1800 Watts Max)


Case Size: μMP10/16: 10.11" x 5" x 1.57" (256.9 mm x 127 mm x 40.0 mm)

Weight: μMP10/16 Case: 2.78 lbs · Single O/P: 0.22 lb.

· Dual O/P: 0.16 lb. · Blank: 0.06 lb.

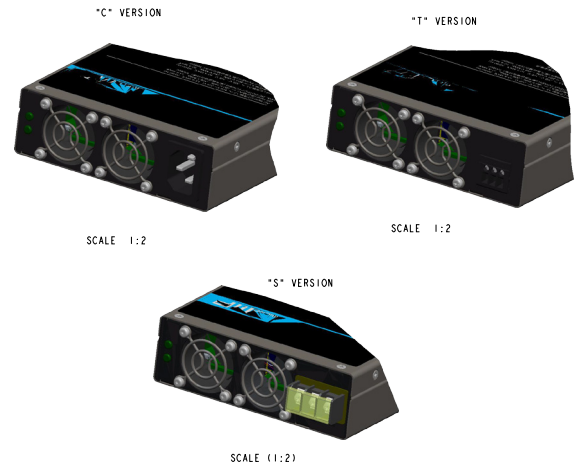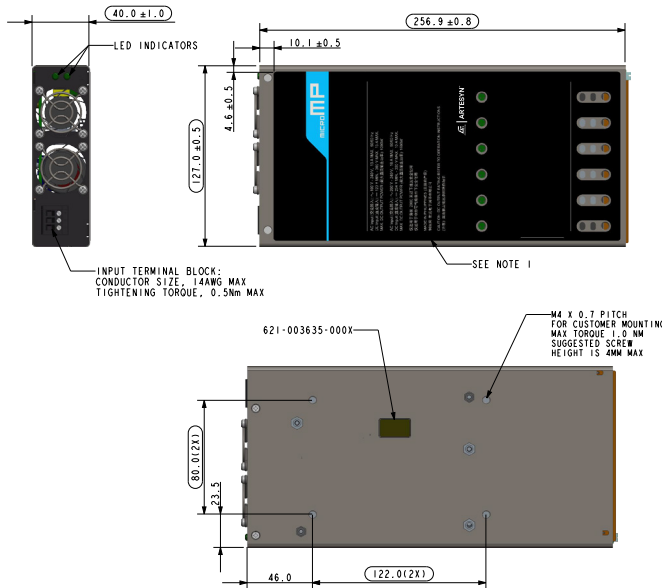

NOTES  
 1. BLACK TOP COVER LABEL, REFER TO IPN 534-000824-000X FOR DETAILS.  
 2. DIMENSIONS ARE IDENTIFIED FOR INSPECTION BY BEING ENCLOSED IN AN OUBOUND.

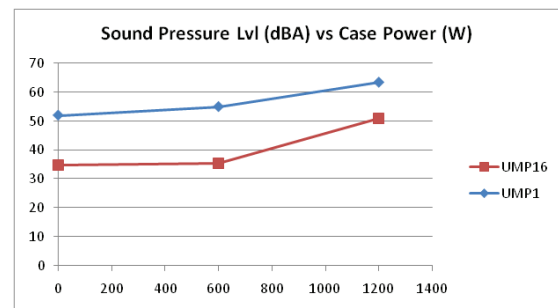

#### Notes:

- Input: IEC 60320 C13 (for IEC connector)  
Barrier Type DECA Switchlab MT300-50003 (for terminal block connector); Max Torque: 4.0 lb-in (0.4 - 0.5 Nm); Wire: 12 - 16 AWG; Wire Strip Length: 0.354" (9.0 mm)
- Control Connectors (J1 and J2): 10-position housing, brass, matte tin-plated contacts. Mates with housing 2050S1000 (Landwin) with 2053T011P (Landwin) pins or housing PHDR-10VS (JST) and SPHD-002T-PO.5 (JST) pins.
- Output Module Connectors: All single O/P modules are M4 x 10 mm screws; tighten between 6.94 to 8.68 lb-in (8.0 to 10.0 kg-cm). Dual O/P module is PUSH IN conductor connector; Wire Strip Length: 0.315" (8.0 mm); Control signal connector: Refer to Item 2.
- Chassis Material: Steel with chemical film coating (conductive).
- Customer Mounting: Screw M4-type mounting holes; Max. Penetration is 0.138" (3.5 mm); Max. Torque: 8.85 lb-in (1.0 N-m)
- All dimensions are in millimeters and inches, and are typical.

## μMP HUP MODULE

The μMP HUP module is intended for use on μMP09 with high efficiency module (SK\*) configurations. In such case, only one HUP can be used per case.

Its application is limited with μMP09 and μMP04 configurations and may have multiple HUP's inserted.

The HUP module shall provide additional 224μF bulk capacitance (typ.). Typical hold-up time increase with HUP module in μMP09 case and SK\* module is 10ms at 500W load.




73-950-002

Actual μMP HUP Module and μMP09 Configuration



μMP09 Config with HUP at Slot1

Typical HUP Response with μMP09-SKW Configuration

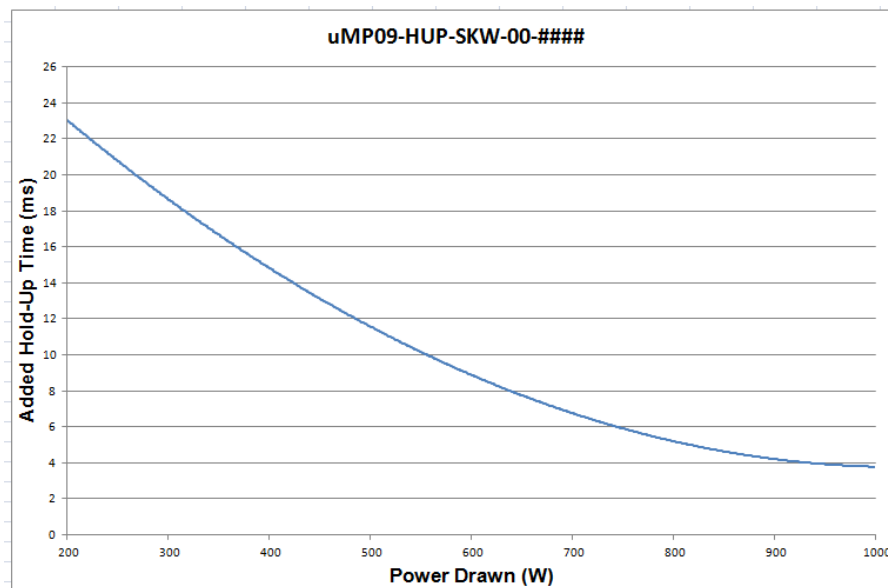

μMP HUP MODULE (CONTINUED)

Typical HUP Response with μMP09-S2\* Configuration





## ABOUT ADVANCED ENERGY

Advanced Energy (AE) has devoted more than three decades to perfecting power for its global customers. AE designs and manufactures highly engineered, precision power conversion, measurement and control solutions for mission-critical applications and processes.

Our products enable customer innovation in complex applications for a wide range of industries including semiconductor equipment, industrial, manufacturing, telecommunications, data center computing, and medical. With deep applications know-how and responsive service and support across the globe, we build collaborative partnerships to meet rapid technological developments, propel growth for our customers, and innovate the future of power.

PRECISION | POWER | PERFORMANCE

---