

# EFOY ProCabinet 4060S and 4060SX



Reliable autonomous power supply  
for industrial applications



Dependable off-grid power is a challenge in any application, even more so when powering critical loads in remote locations. The EFOY ProCabinet from SFC Energy is a dependable, self-contained energy solution that delivers 100% reliable power wherever power is required.

**SFC Energy's EFOY ProCabinet** utilizes patented EFOY fuel cell technology combined with solar power to deliver a reliable, autonomous power supply ideal for SCADA/PLC, instrumentation, communication, surveillance and other industrial applications.

The rugged, purpose-built EFOY ProCabinet integrates the fuel cell in an insulated NEMA 3R -40° C rated enclosure including fuel cartridges, battery bank, solar charge controller, power distribution and room for integrating customer equipment. EFOY ProCabinet Hybrid systems are designed to provide 12 – 18 months of fuel autonomy, making them ideal for long term autonomous deployments.

## The EFOY Pro Hybrid Solutions: what you need to know

- EFOY Fuel Cells are smart energy producers that can continuously and automatically recharge batteries.
- They're based on Direct Methanol Fuel Cell technology, which converts methanol into electricity through a single stage catalytic conversion process.
- When a solar array fails to deliver enough power, the EFOY senses the battery voltage drop and automatically switches on to keep the battery bank charged.
- Once the battery is recharged, the fuel cell returns to standby mode – no maintenance or user intervention required.
- EFOY Pro Fuel Cells have Modbus RTU communications built into the firmware, which allows operators to remotely monitor and control the system and schedule fuel replacements.
- EFOY Pro Hybrid solutions deliver 30 – 50% total cost of ownership savings over alternative off-grid technologies.
- EFOY Pro Fuel Cells are 10 X more efficient, produce up to 99% fewer emissions and only consume 1 – 2% of the volume of fuel vs fuel gas genset technology.



Find more information on [efoy-pro.com](http://efoy-pro.com)

# ProCabinet system design

**SFC Energy's EFOY ProCabinets** are hybrid power solutions in insulated -40°C rated NEMA 3R enclosures, which house the fuel cell, fuel cartridges, battery bank, solar charge controller, power distribution and customer equipment. Exhaust heat generated by the EFOY is captured inside the cabinet to keep the battery bank and all the electronic components warm in winter, further improving the efficiency of the system and eliminating the need for a heater.

## EFOY ProCabinet Specs

Dimensions (D x W x H)	660 x 914 x 1118 mm / 26 x 36 x 44 inch
Weight (empty, on stand)	136 kg / 300 lbs
Housing	Powder coated steel enclosure
Housing color – standard	Grey
IP-protection category	Nema 3R Weatherproof
Nominal voltage	12 V or 24 V
Temperature range	-40 °C to +50 °C / -40 °F to +122 °F
Certification	CSA 22.2 Industrial Control Panel Specifications

## 4060S

## 4060SX

Dimensions (D x W x H)	660 x 1270 x 1118 mm / 26 x 50 x 44 inch
Weight (empty, on stand)	272 kg / 600 lbs
Housing	Powder coated steel enclosure
Housing color – standard	Grey
IP-protection category	Nema 3R Weatherproof
Nominal voltage	12 V or 24 V
Temperature range	-40 °C to +50 °C / -40 °F to +122 °F
Certification	CSA 22.2 Industrial Control Panel Specifications

## Hybrid Power Supply Specs

EFOY Fuel Cell	EFOY Pro 800 or 2400 Duo
Solar Panels (subject to design)	Up to 2 x 400 Wp 72 cell solar panels (800 W)
Solar Charge Controller	25 A MPPT
Nominal voltage	12 V or 24 V
Temperature range	-40 °C to +50 °C / -40 °F to +122 °F
Certification	CSA 22.2 no. 14.05 & cETL/us Certification
EFOY Fuel Cartridges	Max 2 x M28 (28 L) cartridges
Battery capacity @ 12 V / 24 V	2 x 100Ah or 156Ah 12 V Sealed AGM batteries
EFOY Remote Monitoring	Modbus RTU / SFC Connect / TBox (optional)
Additional space for customer equipment	Yes - DIN rail mounting for small devices


EFOY Pro 800 or 2400 Duo
Up to 8 x 400 Wp 72 cell solar panels (3200 W)
60 A - 96 A MPPT
12 V or 24 V
-40 °C to +50 °C / -40 °F to +122 °F
CSA 22.2 no. 14.05 & cETL/us Certification
Max 2 x M28 (28 L) cartridges
2 x 100Ah or 156Ah 12 V Sealed AGM batteries
Modbus RTU / SFC Connect / TBox (optional)
Yes - on back pan in extended side cabinet

## EFOY Pro Hybrid Solutions

Guaranteed power availability 24 / 7 / 365.

Smart, automatic battery charging supplements solar shortfalls.

2x M28 fuel cartridges provide 62 kWh of energy autonomy – enough to power a 50 W load for 52 days without any solar input. Combined with a solar array, the hybrid solution provides 12 – 18 months of energy autonomy and superior power reliability.

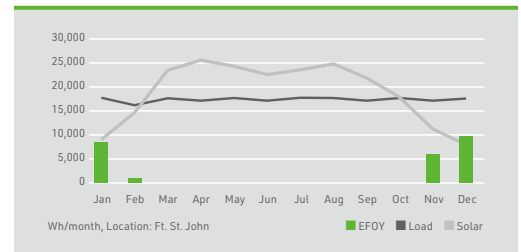

## Certified safety

