

# LHC Series, 250 Watt

AC-DC Power Supply

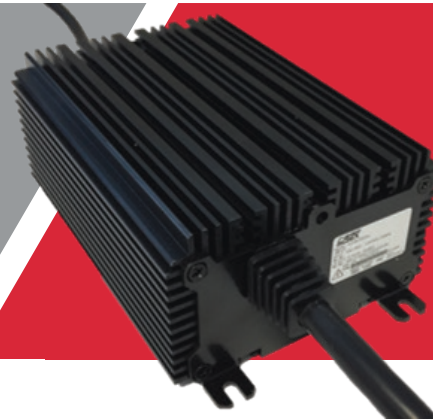


Image for illustration purposes only and is NTS. Some details may vary in appearance.

The LHC is a series of ruggedized IP67 (sealed enclosure) convection cooled AC-DC power modules intended for harsh environment deployments and provide a single regulated Constant Voltage (CV) or Constant Current (CC) mode output designed as voltage sources for general industrial applications.

The power module is encapsulated in a thermally conductive material that transfers internal heat into the extruded aluminum chassis for environmental management.

## Features

- Universal AC input with active PFC
- 12V, 24V & 48V constant voltage with constant current overload protection characteristic
- IP67 Enclosure
- 250W convection cooled
- True zero load operation of the Main (V1)
- 6.29" x 3.90" x 2.24" (159.8mm x 99mm x 57mm) footprint
- High efficiency 93% nominal, 100% load
- RoHS2 & REACH compliant
- Two Year Standard Warranty



## Table of Contents

Part Number Selection Table .....	2	Isolation Characteristics .....	6
Input Characteristics .....	2	Emissions and Immunity .....	6
Output Characteristics .....	3	Status and Control Signals .....	7
Constant Voltage Overload Performance Curves ..	4	Input & Output Connections .....	7
Efficiency Performance Curves (25°C Ambient Temperature) .....	5	Application Notes .....	7
Environmental Characteristics .....	5	EMI Considerations .....	7
Protection Characteristics .....	6	Thermal Considerations .....	8
		Mechanical Dimensions (Nominal) .....	8





# LHC Series, 250 Watt

AC-DC Power Supply

## Output Characteristics

Parameter	Conditions	Min	Typ	Max	Units	
Output Regulation Window <sup>1</sup> (includes set point, line, load temperature)	50% loading; 90-264Vac input source	ACS12.250LHC	11.88	12.00	12.12	Vdc
		ACS24.250LHC	23.76	24.00	24.24	
		ACS48.250LHC	47.52	48.00	48.48	
DC Output Current		ACS12.250LHC	0		20.8	Adc
		ACS24.250LHC	0		10.4	
		ACS48.250LHC	0		5.2	
Minimum Load Capability	Stable Operation down to 0 Adc, no minimum load required.	0				
Overload Protection	Constant Current "brick wall" 100% to approximately 75% of V Nom; hiccup protection <75% of V Nom. See curves for additional details.					
Output Ripple & Noise	Voltage Zero to Full Load; 20MHz bandwidth <sup>2</sup>			1.5	% of V Nom	
Transient Response <sup>3</sup>	50% load step, from 10% minimum load 1A/μsec slew rate			± 5	%	
Settling Time to 1% of Nominal			2	msec		
Turn-On Delay	After application of input power to rise of output voltage			3	sec	
Output Voltage Rise	Monotonic between 10% to 90% of output voltage					
Capacitive Loading	ACS12.250LHC			6,000	μF	
	ACS24.250LHC			1,200		
	ACS48.250LHC			750		

<sup>1</sup> measured at stripped ends of output cable


<sup>2</sup> measured with a parallel combination of ceramic and OSCON capacitors at the power module output cables. A short coaxial cable connected directly to the input of a scope is required

<sup>3</sup> min. 1 second time between consecutive transients.



## Efficiency Performance Curves (25°C Ambient Temperature)

Typical example; ACS48.250CEV Model

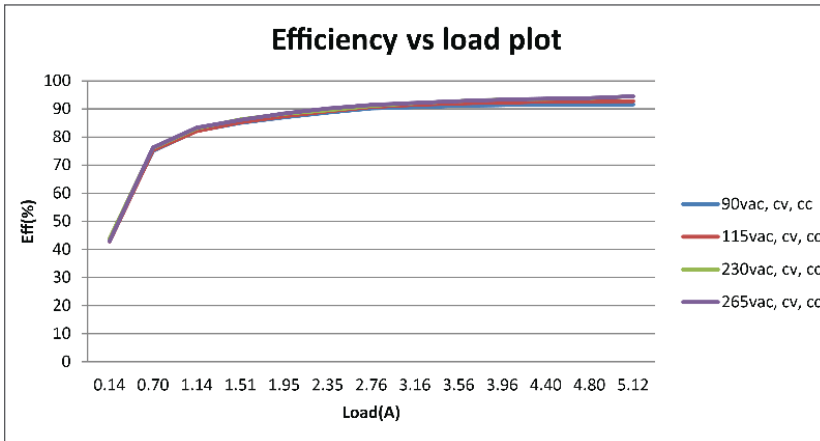

## Environmental Characteristics

Parameter	Conditions	Min.	Typ	Max.	Units
Storage Temperature Range		-40		85	°C
Operating Temperature Range	External local temperature (ambient) surrounding case. Refer to Thermal Considerations	-20		50	
Operating Humidity	Non-condensing	10		95	%
MTBF	Telcordia SR-332 Issue 3; M1C3 @ 40°C Telcordia SR-332 Issue 3; M1C3 @ 25°C		2,145K 4,500K		Hours
Shock	30G, non-operating	Complies			
Operational Vibration	Sine Sweep; 5-150Hz, 2G Random Vibration, 5-500Hz, 1.11G	Complies			
ITE Standards Audio/Video & Consumer Standards (Planned submissions):	CB: IEC 60950-1:2005; IEC 60950-1:2005/AMD1:2009; IEC 60950-1:2005/AMD2:2013 CSA: CAN/CSA-C22.2 No. 60950-1-07, Amendment 1:2011, Amendment 2:2014 (MOD); ANSI/UL 60950-1-2014 IEC 62368-1 (pending) CAN/CSA-C22.2 No. 62368-1 (pending) UL 62368-1 (pending)CE Marking per LVD				
Fuse	Single 6.3A time lag; 250V, high breaking capacity				
Outside Dimensions	6.29" x 3.90" x 2.24" (159.8mm x 99mm x 57mm) nominal				
Weight (typ.)	1.57				kg



# LHC Series, 250 Watt

AC-DC Power Supply

## Protection Characteristics

Parameter	Conditions	Min.	Typ.	Max.	Units
Over Voltage Protection <sup>2</sup> ; ACSxx.250LHC (Constant Voltage) models; latching requires recycle of AC source to reset.		110		140	%1
Short Circuit Current Protection; all variants	V1, hiccup	140		150	%2
Over Temperature Protection (Chassis Temperature); Auto-recovery (approximately 18°C hysteresis); refer to Thermal Considerations		105	110	120	°C

<sup>1</sup> Percentage of nominal output voltage

<sup>2</sup> Percentage of max CC level.

## Isolation Characteristics

Parameter	Conditions	Min.	Typ	Max.	Units
Isolation	Primary to Chassis (basic)	2680			Vdc
	Primary to Secondary (reinforced)	4242			
	Secondary to Chassis	500			
Earth Leakage Current	264Vac, 60Hz, 25°C	single fault condition	300		µA
		normal conditions	150		

## Emissions and Immunity

Characteristic	Standard	Compliance
Input Current Harmonics	IEC/EN 61000-3-2	Class A
Voltage Fluctuation and Flicker	IEC/EN 61000-3-3	Complies
Conducted Emissions <sup>1</sup>	CISPR32/EN 55032	Class B
	FCC Part 15	Class B
Radiated Emissions <sup>1</sup>	CISPR 22 -3 meter	Class B
	FCC 15.109 - 3 meter	Class B
ESD Immunity	IEC/EN 61000-4-2	Level 4, ±8kV Contact; ±15kV air discharge; Criteria A
Radiated Field Immunity	IEC/EN 61000-4-3	Level 3, Criterion A
Electrical Fast Transient Immunity	IEC/EN 61000-4-4	Level 4, 2kV, Criterion A
Surge Immunity	IEC/EN 61000-4-5	Level 3, Criterion B (1kV CM, 2kV DM)
Radiated Field Conducted Immunity	IEC/EN 61000-4-6	Level 3, 10V/m, Criterion A
Magnetic Field Immunity	IEC/EN 61000-4-8	Level 3, Criterion A
Voltage dips, interruptions	IEC/EN 61000-4-11	Level 3, Criterion B

<sup>1</sup> Requires a common mode choke on the blue and black wires of output cable. Four (4) turns of these wires need to be wound in same direction around a toroid (such as FAIR-RITE#5943001801) See additional "EMI considerations"

## Status and Control Signals

Parameter	Conditions
PRESENT_x	A passive signal line directly connected to the Main Output V1 DC Output return “-VE”. Offers a convenient means to verify that the output connector has been correctly connected
PS_ON_x	This signal is intended to turn on/off (enable/disable) the main output for the following purposes: For general deployments in the industrial sector Reset the output following abrupt disconnection of a charging battery (load dump). There are two possible options for the “logic” of this signal:
	PS_ON_H (Default) Active “high”; this signal can be left unterminated to enable (turn on) the main output. If it is desired to turn off the Main Output (during normal operation) then this pin can be pulled “low” to the Main output ground “-VE”. Signal is pulled up to internal +5V bias supply via 10kOhm; when pulled low (externally) sink current approx. 2mA.
	PS_ON_L Active “low” i.e. externally pulled “low” to the main output ground “-VE” to enable (turn on) the main output. Signal is pulled up to +5V internally via 10kOhm. When pulled low (externally) sink current approx. 2mA.

## Input & Output Connections

Two permanently attached SJTW, VW-1 type cables are provided for the input and output connections

### Input Wires: 3x17AWG

Wire Colour:	Function:
Brown	AC Line 1
Blue	AC Line 2 Neutral
Green/ Yellow	PE/Ground

### Output Wires: 4x17AWG

Wire Colour:	Function:
Blue	Main Output “+VE”
Black	Main Output Return “-VE”
Brown	PRESENT
Green/ Yellow	PS_ON

## Application Notes



This series of power modules have been evaluated as components for building-in. A suitable electrical and fire enclosure shall be provided in the end use equipment and shall be installed in compliance with the enclosure, mounting, clearances, creepage distances and segregation requirements of the ultimate application.

## EMI Considerations

For optimum EMI performance, the power supply should be mounted to a metal plate grounded to all 4 mounting holes of the power supply. To comply with safety standards, this plate must be properly grounded to protective earth (see mechanical dimension notes). Pre-compliance testing has shown the stand-alone power supply to comply with EN55022 class B radiated emissions with a metal enclosure with grounded base plate. Radiated emission results vary with system enclosure and cable routing paths.

